

如何订购/ HOW TO ORDER

2	P	DF	规格 Size	旋向 Rotation	轴伸 Shaft	前盖 Front cover	油口 Ports	油口位置 Ports position	油封 Seals	可选项 Options
组别 Group	P-齿轮泵 Pump M-齿轮马达 Motor	系列号 Series UF-前、后盖材料为铝合金 UF-Front and end cover material aluminum DF-前、后盖材料为铸铁,压力比UF系列高 30bar。 DF-Front and end cover material cast iron, pressure than DF series high 30 bar.	3 4 6 8 10 12 14 16 18 20 22 25 28 30	D 顺时针转 Clockwise S 逆时针转 Counter clockwise R 可正反转 Reversible		T2 T3 T4 C0 C1 C2 R1		油口位置 /Ports position 省略-侧进侧出 Omit-Side inlet and side outlet B-后进前出 B-Back inlet and front outlet C-后进侧出 C-Back inlet and side outlet D-侧进前出 D-Side inlet and front outlet R-后进后出 R-Back inlet and back outlet		排油管 / Drain Q0-内部排油 / internal drain Q1-外部排油 / external drain G1/4 Q2-外部排油 / external drain 9/16-18 UNF Q3-外部排油 / external drain 7/16-20 UNF Q4-外部排油 / external drain M12x1.5

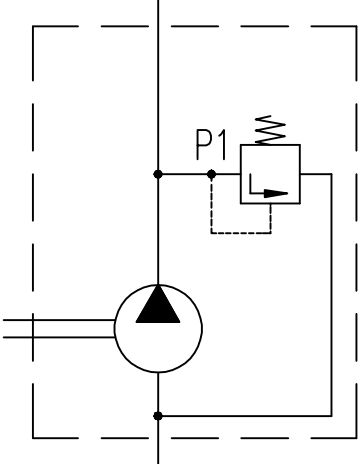
油封

省略-温度范围在-10℃~+80℃ ,进油口最高绝对压力为3bar。
V-适用于高温介质, 温度范围在-10℃~+120℃。
H-适用于低温介质, 温度范围在-40℃~+80℃。
T-适用于进油口最大绝对压力3~6bar。
N-适用于进油口最大绝对压力3~10bar。

Seals

Omit-Range between -10℃ and +80℃, inlet pressure up to max. 3 bar absolute.
V-Version suitable for fluid at hi-temperatures, range between -10℃ and +120℃.
H-Version suitable for fluid at low-temperatures, range between -40℃ and +80℃.
T-Version suitable for inlet pressure up to max. 3 and 6 bar absolute.
N-Version suitable for inlet pressure up to max. 3 and 10 bar absolute.

可选项/Options

 溢流阀。 卸压流量
--

