

Axial piston variable pump (A)A10VSO Series 31

Americas

RE-A 92711

Edition: 04.2017

Replaces: 04.2012



- ▶ All-purpose medium pressure pump
- ▶ Sizes 18 to 140
- ▶ Nominal pressure 4100 psi (280 bar)
- ▶ Maximum pressure 5100 psi (350 bar)
- ▶ Open circuit

Features

- ▶ Variable pump with axial piston rotary group in swash-plate design for hydrostatic drives in open circuit.
- ▶ The flow is proportional to the drive speed and displacement.
- ▶ The flow can be infinitely varied by adjusting the swash-plate angle.
- ▶ 2 drain ports
- ▶ Excellent suction performance
- ▶ Low noise level
- ▶ Long service life
- ▶ Favorable power/weight ratio
- ▶ Versatile controller range
- ▶ Short control time
- ▶ The through drive is suitable for adding gear pumps and axial piston pumps up to the same size, i.e., 100% through drive.
- ▶ Suitable for operation with mineral oil and HF hydraulic fluids

Contents

Type code	2
Hydraulic fluids	4
Working pressure range	6
Technical data, standard unit	7
Technical data, high-speed version	8
Technical data, HF hydraulic fluids, maximum rotational speed	9
DG – Two-point control, direct operated	12
DR – Pressure controller	13
DRG – Pressure controller, remote controlled	14
DFR/DFR1 – Pressure flow controller	15
DFLR – Pressure, flow and power control	17
ED – Electrohydraulic pressure control	18
ER – Electrohydraulic pressure control	19
Dimensions, size 18 to 140	20
Dimensions, through drive	38
Overview of mounting options	42
Combination pumps (A)A10VSO + (A)A10VSO	43
Connector for solenoids	44
Installation instructions	45
Project planning notes	48
Safety instructions	48

Type code

01	02	03	04	05	06	07	08	09	10	11	12	13
	A10VS	O			/	31		-	V			

Version									18	28	45	71	88	100	140
01	Standard version (without code)								•	•	•	•	•	•	•
	HFA, HFB, HFC hydraulic fluid (except for Skydrol)								•	•	•	•	•	•	E
	High-speed version (external dimensions are not affected by this option).								-	-	•	•	-	•	H

Axial piston unit								
02	Swashplate design, variable, nominal pressure 4100 psi (280 bar), maximum pressure 5100 psi (350 bar)	●	–	–	–	–	–	A10VS
		–	●	●	●	●	●	AA10VS

Operating mode									
03	Pump, open circuit								O

Size (NG)								
04	Geometric displacement, (see table of values on pages 6 and 7)	18	28	45	71	88	100	140

Control device												
05	Two-point control, direct operated			●	●	●	●	●	●	●	DG	
	Pressure controller	hydraulic		●	●	●	●	●	●	●	DR	
			with flow controller	hydraulic	X-T open	●	●	●	●	●	●	DFR
					X-T plugged with flushing function	●	●	●	●	●	●	DFR1
					X-T plugged without flushing function	●	●	●	●	●	●	DRSC
	with pressure cut-off	hydraulic	remote controlled		●	●	●	●	●	●	●	DRG
				electrical	negative control	$U = 12\text{ V}$	●	●	●	●	●	●
		$U = 24\text{ V}$	●			●	●	●	●	●	●	ED72
		electrical	positive control	$U = 12\text{ V}$	●	●	●	●	●	●	●	ER71
				$U = 24\text{ V}$	●	●	●	●	●	●	●	ER72
		Pressure,flow and power controller			—	●	●	●	●	●	●	●

Series		
06	Series 3, index 1	31

Direction of rotation			
07	Viewed on drive shaft	clockwise	R
		counter-clockwise	L

Sealing material									
08	FKM (fluoroelastomer)								V
	NBR (nitrile rubber) only if using HFA, HFB and HFC hydraulic fluids (position 01; order code "E")								P

Drive shaft										
09	Splined shaft ANSI B92.1a	standard shaft	●	●	●	●	●	●	●	S
		similar to shaft “S” however for higher input torque	●	●	●	●	●	–	–	R
		reduced diameter, not for through drive	●	–	–	–	–	●	–	U
	Parallel keyed shaft ISO 3019-1	permissible through-drive torque (see page 10)		●	●	●	●	●	●	●

Mounting flange			18	28	45	71	88	100	140	
10	ISO 3019-1	2-hole	●	●	●	●	●	●	●	C
		4-hole	—	—	—	—	—	—	●	D

Working port										
11	SAE flange port UNC fastening thread	at side, opposite	●	●	●	-	-	●	●	62
			-	-	-	●	●	-	-	92

01	02	03	04	05	06	07	08	09	10	11	12	13
	A10VS	O			/	31		-	V			

Through drive (for mounting options, see page 42)

12	Flange ISO 3019-1		Hub for splined shaft ¹⁾									
	Diameter		Diameter		18	28	45	71	88	100	140	
	without through drive				●	●	●	●	●	●	●	N00
	82-2 (A)	5/8 in 9T 16/32DP			●	●	●	●	●	●	●	K01
		3/4 in 11T 16/32DP			●	●	●	●	●	●	●	K52
	101-2 (B)	7/8 in 13T 16/32DP			-	●	●	●	●	●	●	K68
		1 in 15T 16/32DP			-	-	●	●	●	●	●	K04
	127-2 (C)	1 1/4 in 14T 12/24DP			-	-	-	●	●	●	●	K07
		1 1/2 in 17T 12/24DP			-	-	-	-	●	●	●	K24
	152-4 (D)	1 3/4 in 13T 8/16DP			-	-	-	-	-	-	●	K17

Connectors for solenoids²⁾

13	Without connector (without solenoid, with hydraulic control only, without code)				●	●	●	●	●	●	●	
	HIRSCHMANN connector – without suppressor diode				●	●	●	●	●	●	●	H

● = Available ○ = On request - = Not available

Notice

- Note the project planning notes on page 48.
- In addition to the type code, please specify the relevant technical data when placing your order.

¹⁾ Hub for splined shaft according to ANSI B92.1a

²⁾ Connectors for other electric components can deviate.

Hydraulic fluids

The (A)A10VSO variable pump is designed for operation with HLP mineral oil according to DIN 51524-2.

Application instructions and requirements for hydraulic fluids should be taken from the following data sheets before the start project planning:

- ▶ 90220: Hydraulic fluids based on mineral oils and related hydrocarbons
- ▶ 90221: Environmentally acceptable hydraulic fluids
- ▶ 90222: Fire-resistant, water-free hydraulic fluids (HFDR/HFUD) (for permissible technical data, see data sheet 90225)
- ▶ 90223: Fire-resistant, water-containing hydraulic fluids (HFAE, HFA, HFB, HFC) for version “E” see also data sheet 90225.
- ▶ 90225: Restricted technical data only for operation with fire-resistant, water-free and water-containing hydraulic fluids (HFDR, HFUD, HFA, HFB, HFC)- technical data

Notes on selection of hydraulic fluid

The hydraulic fluid should be selected so that the operating viscosity in the operating temperature range is within the optimum range (v_{opt} see selection diagram).


Notice

- ▶ The axial piston unit is suitable for operation with water-containing HF hydraulic fluid. See version “E”

Viscosity and temperature of hydraulic fluids

	Viscosity	Shaft seal	Temperature ³⁾	Comment
Cold start	$v_{max} \leq 7400$ SUS (1600 mm ² /s)	NBR ²⁾	$\theta_{St} \geq -40$ °F (-40 °C)	$t \leq 3$ min, without load ($p \leq 725$ psi (50 bar)), $n \leq 1000$ min ⁻¹ Permissible temperature difference between axial piston unit and hydraulic fluid in the system maximum 45 °F (25 K)
		FKM	$\theta_{St} \geq -13$ °F (-25 °C)	
Warm-up phase	$v = 7400$ to 1850 SUS (1600 to 400 mm ² /s)			$t \leq 15$ min, $p \leq 0.7 \times p_{nom}$ and $n \leq 0.5 \times n_{nom}$
Continuous operation	$v = 1850$ to 60 SUS (400 to 10 mm ² /s) ¹⁾	NBR ²⁾	$\theta = +185$ °F (+85 °C)	measured at port L , L₁
	$v_{opt} = 170$ to 74 SUS (36 to 16 mm ² /s)	FKM	$\theta = +230$ °F (+110 °C)	Range of optimum operating viscosity and efficiency
Short-term operation	$v_{min} = 60$ to 50 SUS (10 to 7 mm ² /s)	NBR ²⁾	$\theta = +185$ °F (+85 °C)	$t \leq 3$ min, $p \leq 0.3 \times p_{nom}$, measured at port L , L₁
		FKM	$\theta = +230$ °F (+110 °C)	

▼ Selection diagram

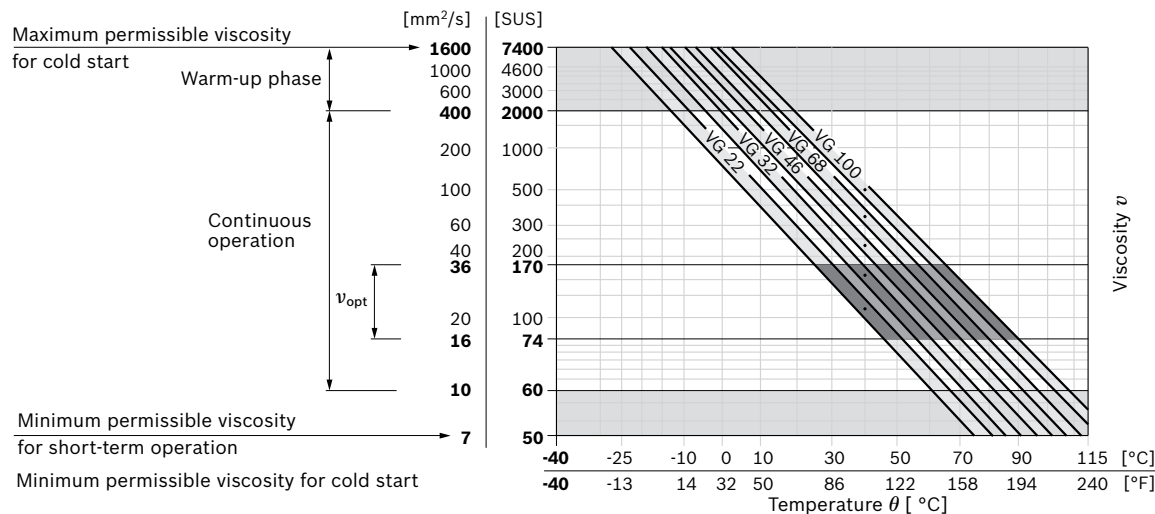

- 1) Corresponds e.g. for VG 46 to a temperature range of +39.2 °F (+4 °C) to +185 °F (+85 °C) (see selection diagram)
- 2) Version EA10VSO...-P (if operating with HFA, HFB and HFC hydraulic fluids)

- 3) If the temperature at extreme operating parameters cannot be adhered to, please contact us.

Filtration of the hydraulic fluid

Finer filtration improves the cleanliness level of the hydraulic fluid, which increases the service life of the axial piston unit. A cleanliness level of at least 20/18/15 is to be maintained according to ISO 4406.


At very high hydraulic fluid temperatures (maximum 230 °F (110 °C), measured at port **L, L₁**), at least a cleanliness level of 19/17/14 according to ISO 4406 is necessary.

Please contact us if the above classes cannot be observed.

Working pressure range

Pressure at working port B		Definition
Nominal pressure p_{nom}	4100 psi (280 bar)	The nominal pressure corresponds to the maximum design pressure.
Maximum pressure p_{max}	5100 psi (350 bar)	The maximum pressure corresponds to the maximum working pressure within the single operating period. The sum of the single operating periods must not exceed the total operating period.
Single operating period	2 ms	
Total operating period	300 h	
Minimum pressure $p_{B abs}$ (high-pressure side)	145 psi (10 bar) ¹⁾	Minimum pressure on the high-pressure side (B) which is required in order to prevent damage to the axial piston unit.
Rate of pressure change $R_{A max}$	232060 psi/s (16000 bar/s)	Maximum permissible speed of pressure build-up and reduction during a pressure change across the entire pressure range.
Pressure at suction port S (inlet)		
Minimum pressure $p_{S min}$ Standard	12 psi (0.8 bar) absolute	Minimum pressure at suction port S (inlet) that is required in order to avoid damage to the axial piston unit. The minimum pressure depends on the rotational speed and displacement of the axial piston unit.
Maximum pressure $p_{S max}$	145 psi (10 bar) absolute	For higher inlet pressure, please consult us
Leakage pressure at port L, L ₁		
Maximum pressure $p_{L max}$	30 psi (2 bar) absolute ¹⁾	Maximum 7.5 psi (0.5 bar) higher than inlet pressure at port S , but not higher than $p_{L max}$. A case drain line to the reservoir is required.

▼ Rate of pressure change $R_{A max}$

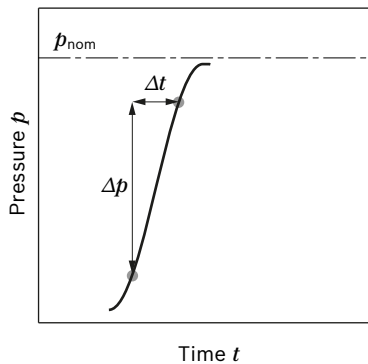


Notice

Working pressure range valid when using hydraulic fluids based on mineral oils. Please contact us for values for other hydraulic fluids.


Minimum permissible inlet pressure at suction port **S** with speed increase

In order to avoid damage to the pump (cavitation), a minimum inlet pressure must be guaranteed at suction port **S**. The minimum inlet pressure level depends on the rotational speed and the displacement of the variable pump.

▼ Pressure definition

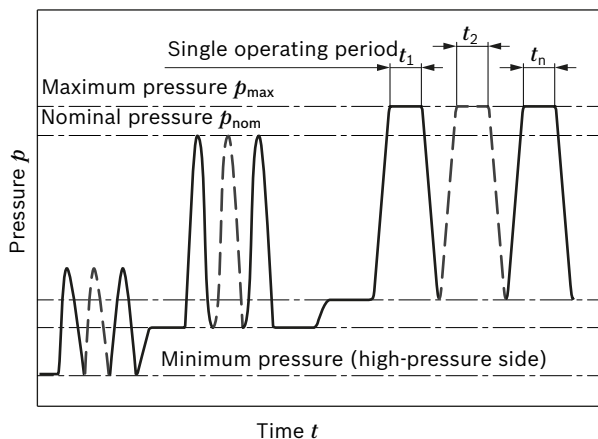

Total operating period = $t_1 + t_2 + \dots + t_n$

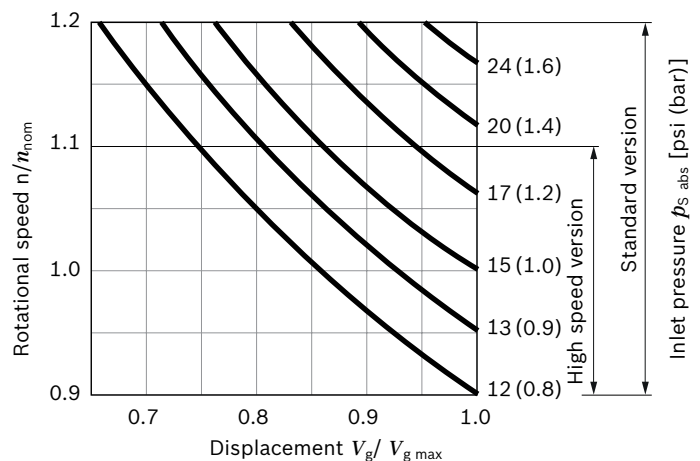

During continuous operation in overspeed over n_{nom} , a reduction in operational service life is to be expected due to cavitation erosion.

1) Other values on request

Technical data, standard unit

Size		NG		18	28	45	71	88	100	140
Displacement, geometric, per revolution		$V_{g \max}$	in ³ (cm ³)	1.10 (18)	1.71 (28)	2.75 (45)	4.33 (71)	5.37 (88)	6.10 (100)	8.54 (140)
Rotational speed maximum ¹⁾	at $V_{g \max}$	n_{nom}	rpm	3300	3000	2600	2200	2100	2000	1800
	at $V_g < V_{g \max}^{2)}$	$n_{\text{max perm}}$	rpm	3900	3600	3100	2600	2500	2400	2100
Flow	at n_{nom} and $V_{g \max}$	$q_{v \max}$	gpm (l/min)	15.6 (59)	22 (84)	30.9 (117)	41.2 (156)	48.9 (185)	52.8 (200)	67 (252)
	at $n_E = 1800$ rpm	$q_{vE \max}$	gpm	8.5	13.3	21.4	33.8	41.8	47.6	67
	and $V_{g \max}$		(l/min)	(32)	(50)	(81)	(128)	(158)	(180)	(252)
Power	at n_{nom} , $V_{g \max}$	$P_{\max}$	HP (kW)	38 (28)	52 (39)	74 (55)	98 (73)	115 (86)	125 (93)	156 (118)
	at $n_E = 1800$ rpm	$P_{E \max}$	HP (kW)	19 (15)	31 (24)	50 (38)	79 (69)	99 (74)	111 (84)	156 (118)
Torque	$\Delta p = 4100$ psi (280 bar)	$T_{\max}$	lb-ft (Nm)	59 (80)	92 (125)	148 (200)	233 (316)	289 (392)	328 (445)	460 (623)
	at $V_{g \max}$ and $\Delta p = 1450$ psi (100 bar)	T	lb-ft (Nm)	22 (30)	33 (45)	53 (72)	83 (113)	103 (140)	117 (159)	164 (223)
Rotary stiffness of drive shaft	S	c	lb-ft/rad (Nm/rad)	8177 (11087)	16460 (22317)	27659 (37500)	53019 (71884)	53019 (71884)	89350 (121142)	124970 (169437)
	R	c	lb-ft/rad (Nm/rad)	10953 (14850)	19442 (26360)	30258 (41025)	56457 (76545)	56457 (76545)	– (–)	– (–)
	U	c	lb-ft/rad (Nm/rad)	5967 (8090)	– (–)	– (–)	– (–)	– (–)	67187 (91093)	– (–)
	K	c	lb-ft/rad (Nm/rad)	9839 (13340)	19316 (26189)	32382 (43905)	60562 (82112)	60562 (82112)	99794 (135303)	138961 (188406)
Moment of inertia for rotary group		J_{TW}	lbs-ft ² (kgm ²)	0.022 (0.00093)	0.040 (0.0017)	0.078 (0.0033)	0.197 (0.0083)	0.197 (0.0083)	0.396 (0.0167)	0.574 (0.0242)
Case volume		V	gal (l)	0.106 (0.4)	0.185 (0.7)	0.264 (1.0)	0.420 (1.6)	0.420 (1.6)	0.580 (2.2)	0.790 (3.0)
Weight without through drive (approx.)		m	lbs (kg)	28 (12.9)	40 (18)	52 (23.5)	78 (35.2)	78 (35.2)	109 (49.5)	144 (65.4)
Weight with through drive (approx.)			lbs (kg)	30 (13.8)	43 (19.3)	55 (25.1)	84 (38)	84 (38)	122 (55.4)	164 (74.4)

Notes see page 8

- 1) The values are applicable:
 - At absolute pressure $p_{\text{abs}} = 15$ psi (1 bar) at suction port **S**
 - For the optimal viscosity range of $\nu_{\text{opt}} = 170$ to 80 SUS (36 to 16 mm²/s)
 - For hydraulic fluid based on mineral oils
- 2) For a speed increase up to $n_{\text{max perm}}$, please observe the diagram on page 6.

Technical data, high-speed version (external dimensions are the same as the standard version)

Size		NG		45	71	100	140
Displacement, geometric, per revolution		$V_{g \max}$	in ³ (cm ³)	2.75 (45)	4.33 (71)	6.10 (100)	8.54 (140)
Rotational speed maximum ¹⁾	at $V_{g \max}$	n_{nom}	rpm	3000	2550	2300	2050
	at $V_g < V_{g \max}^{2)}$	$n_{\text{max perm}}$	rpm	3300	2800	2500	2200
Flow		$q_{v \max}$	gmp (l/min)	35.7 (135)	47 (178)	60.8 (230)	75.8 (287)
Power		$P_{\max}$	HP (kW)	84 (63)	111 (83)	143 (107)	180 (134)
Torque at $V_{g \max}$ and	$\Delta p = 4100 \text{ psi (280 bar)}$	$T_{\max}$	lb-ft (Nm)	148 (200)	233 (316)	328 (445)	460 (623)
	$\Delta p = 1450 \text{ psi (100 bar)}$	T	lb-ft (Nm)	53 (72)	83 (113)	117 (159)	164 (223)
Rotary stiffness of drive shaft	S	c	lb-ft/rad (Nm/rad)	27659 (37500)	53019 (71884)	89350 (121142)	125044 (169537)
	R	c	lb-ft/rad (Nm/rad)	30258 (41025)	56457 (76545)	– –	– –
	U	c	lb-ft/rad (Nm/rad)	– –	– –	67187 (91093)	– –
	K	c	lb-ft/rad (Nm/rad)	32270 (43905)	60352 (82112)	99448 (135303)	144680 (188406)
Moment of inertia for rotary group		J_{TW}	lb-ft ² (kgm ²)	0.078 (0.0033)	0.197 (0.0083)	0.396 (0.0167)	0.574 (0.0242)
Case volume		V	gal (l)	0.264 (1.0)	0.420 (1.6)	0.580 (2.2)	0.790 (3.0)
Weight without through drive (approx.)		m	lbs (kg)	52 (23.5)	78 (35.2)	109 (49.5)	144 (65.4)
Weight with through drive (approx.)			lbs (kg)	55 (25.1)	84 (38)	122 (55.4)	164 (74.4)

Notice

- Theoretical values, without efficiency and tolerances; values rounded
- Operation above the maximum values or below the minimum values may result in a loss of function, a reduced service life or in the destruction of the axial piston unit. Bosch Rexroth recommends checking the load by means of test or calculation / simulation and comparison with the permissible values.

1) The values are applicable:
 – At absolute pressure $p_{\text{abs}} = 1 \text{ bar}$ at suction port **S**
 – For the optimal viscosity range of $\nu_{\text{opt}} = 36 \text{ to } 16 \text{ mm}^2/\text{s}$
 – For hydraulic fluid based on mineral oils

2) For a speed increase up to $n_{\text{max perm}}$, please observe the diagram on page 6.



Determining the characteristics		
Flow	$q_v = \frac{V_g \times n \times \eta_v}{231 (1000)}$	[gpm (l/min)]
Torque	$T = \frac{V_g \times \Delta p}{24 (20) \times \pi \times \eta_{mh}}$	[lb-ft (Nm)]
Power	$P = \frac{2 \pi \times T \times n}{33000 (60000)} = \frac{q_v \times \Delta p}{1714 (600) \times \eta_t}$	[HP (kW)]
Key		
V_g Displacement per revolution [in ³ (cm ³)]		
Δp Differential pressure [psi (bar)]		
n Rotational speed [rpm]		
η_v Volumetric efficiency		
η_{hm} Hydraulic-mechanical efficiency		
η_t Total efficiency ($\eta_t = \eta_v \times \eta_{hm}$)		

Technical data, HF hydraulic fluids, maximum rotational speed

Hydraulic fluid ¹⁾ E-version	Size	psi (bar)	NG	18	28	45	71	88	100	140	
HFA	at nominal pressure p_N	2030 (140)	n_{nom}	rpm	2450	2250	1950	1650	1550	1500	1350
	at maximum pressure p_{max}	2350 (160)									
HFB	at nominal pressure p_N	2030 (140)	n_{nom}	rpm	2650	2400	2100	1760	1650	1600	1450
	at maximum pressure p_{max}	2350 (160)									
HFC	at nominal pressure p_N	2540 (175)	n_{nom}	rpm	2650	2400	2100	1760	1650	1600	1450
	at maximum pressure p_{max}	2900 (210)									
Technical data, HFD hydraulic fluids											
HFDR, HFDU polyalkylene glycol	at nominal pressure p_N	4100 (280)	n_{nom}	rpm	2650	2400	2100	1760	1650	1600	1450
HFDU polyol ester	at nominal pressure p_N	4100 (280)			3300	3000	2600	2200	2100	2000	1800

¹⁾ For further information on HF hydraulic fluids, please see data sheets 90223 and 90225

Permissible radial and axial forces of the drive shafts

Size		NG	18	28	45	71	88	100	140
Maximum radial force at a/2		$F_{q \max}$	lbf 79 (N) (350)	270 (1200)	337 (1500)	427 (1900)	427 (1900)	517 (2300)	629 (2800)
Maximum axial force		$\pm F_{ax \max}$	lbf 157 (N) (700)	225 (1000)	337 (1500)	540 (2400)	540 (2400)	899 (4000)	1079 (4800)

Notice

- The values given are maximum values and do not apply to continuous operation. For drives with radial loading (pinion, V-belt drives) please contact us!


Permissible input and through-drive torques

Size			18	28	45	71	88	100	140
Torque at $V_{g\max}$ and $\Delta p = 4100$ psi (280 bar) ¹⁾	T_{max}	lb-ft	59	92	148	232	289	328	460
		(Nm)	(80)	(125)	(200)	(316)	(392)	(445)	(623)
Maximum input torque at drive shaft ²⁾									
S	$T_{E\max}$	lb-ft	91	145	235	462	462	814	1195
		(Nm)	(124)	(198)	(319)	(626)	(626)	(1104)	(1620)
	DIA	in	3/4	7/8	1	1 1/4	1 1/4	1 1/2	1 3/4
R	$T_{E\max}$	lb-ft	118	184	295	475	475	–	–
		(Nm)	(160)	(250)	(400)	(644)	(644)	–	–
	DIA	in	3/4	7/8	1	1 1/4	1 1/4	–	–
U	$T_{E\max}$	lb-ft	43	–	–	–	–	438	–
		(Nm)	(59)	–	–	–	–	(595)	–
	DIA	in	5/8	–	–	–	–	1 1/4	–
K	$T_{E\max}$	lb-ft	77	107	156	319	319	553	875
		(Nm)	(104)	(145)	(212)	(433)	(433)	(750)	(1186)
	DIA	in	0.7500	0.8750	1.0000	1.2500	1.2500	1.5000	1.7500
		(mm)	(19.5)	(22.225)	(25.4)	(31.75)	(31.75)	(38.1)	(44.45)
Maximum through-drive torque									
S	$T_{D\max}$	lb-ft	80	118	235	363	363	573	934
		(Nm)	(108)	(160)	(319)	(492)	(492)	(778)	(1266)
R	$T_{D\max}$	lb-ft	89	130	269	404	404	–	–
		(Nm)	(120)	(176)	(365)	(548)	(548)	–	–
U	$T_{D\max}$	lb-ft	43	–	–	–	–	438	–
		(Nm)	(59)	–	–	–	–	(595)	–
K	$T_{D\max}$	lb-ft	77	107	156	319	319	553	875
		(Nm)	(104)	(145)	(212)	(433)	(433)	(750)	(1186)

¹⁾ Efficiency not considered

²⁾ For drive shafts with no radial force

▼ Distribution of torques

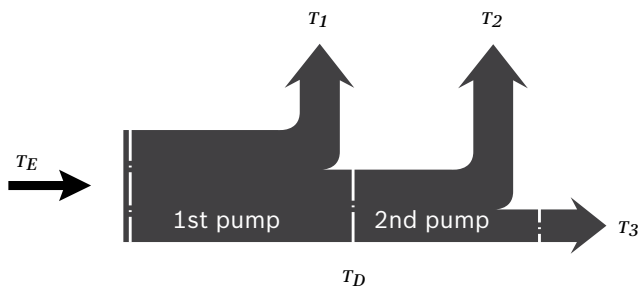

Torque at 1st pump	T_1
Torque at 2nd pump	T_2
Torque at 3rd pump	T_3
Input torque	$T_E = T_1 + T_2 + T_3$
	$T_E < T_{E\,max}$
Through-drive torque	$T_D = T_2 + T_3$
	$T_D < T_{D\,max}$

DG – Two-point control, direct operated

The variable pump can be set to a minimum swivel angle by connecting an external switching pressure to port **X**.

This will supply control fluid directly to the stroking piston; a minimum control pressure of $p_{st} \geq 725 \text{ psi}$ (50 bar) is required.

The variable pump can only be switched between $V_{g \max}$ or $V_{g \min}$.

Please note that the required control pressure at port **X** is directly dependent on the actual working pressure p_B in port **B**. (See control pressure characteristic curve).

The maximum permissible switching pressure is 4100 psi (280 bar).


Switching pressure p_{st} in **X** = 0 psi (0 bar) $\triangleq V_{g \max}$

Switching pressure p_{st} in **X** $\geq 725 \text{ psi}$ (50 bar) $\triangleq V_{g \min}$

▼ Switching pressure characteristic curve



▼ Circuit diagram

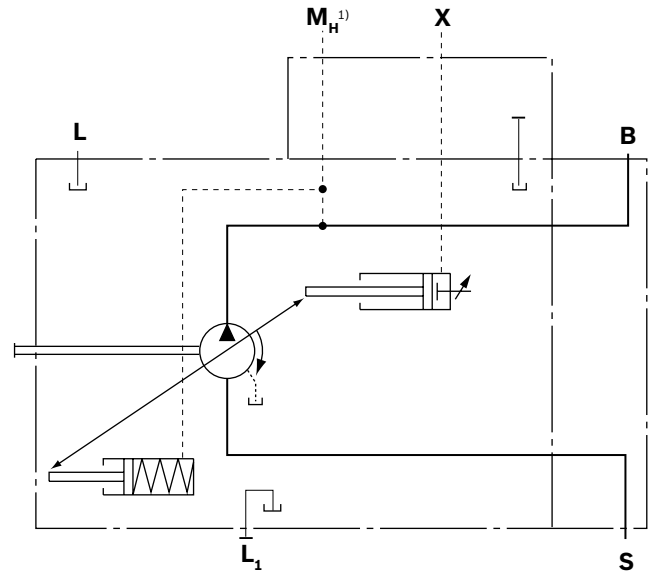


1) Only size 140

DR – Pressure controller

The pressure controller limits the maximum pressure at the pump outlet within the control range of the variable pump. The variable pump only supplies as much hydraulic fluid as is required by the consumers. If the working pressure exceeds the pressure command value at the pressure valve, the pump will regulate to a smaller displacement to reduce the control differential.


- ▶ Initial position in depressurized state: $V_{g \max}$.
- ▶ Setting range¹⁾ for infinitely variable 290 to 4100 psi (20 to 280 bar) pressure control. Standard is 4100 psi (280 bar).

▼ Characteristic curve

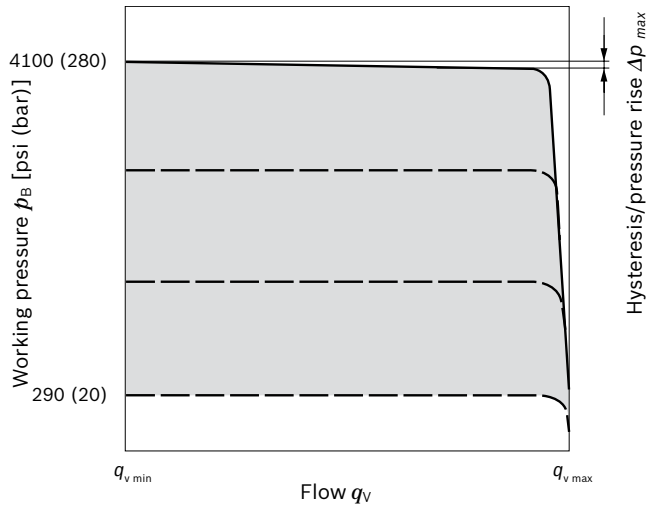


Characteristic curve valid at $n_1 = 1500$ rpm
and $\theta_{\text{fluid}} = 122$ °F (50 °C).

▼ Circuit diagram, sizes 18 to 100

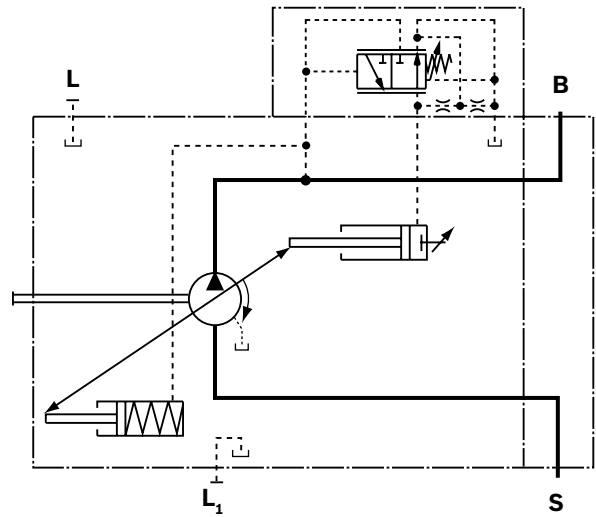

▼ Circuit diagram, size 140




Controller data

NG		18	28	45	71	88	100	140
Pressure increase	Δp [psi (bar)]	60 (4)	60 (4)	87 (6)	115 (8)	130 (9)	145 (10)	175 (12)
Hysteresis and repeatability	Δp [psi (bar)]	maximum 45 (3)						
Control fluid consumption	[gpm (l/min)]	maximum approx. 0.8 (3)						

¹⁾ In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.

▼ **Characteristic curve DRG**

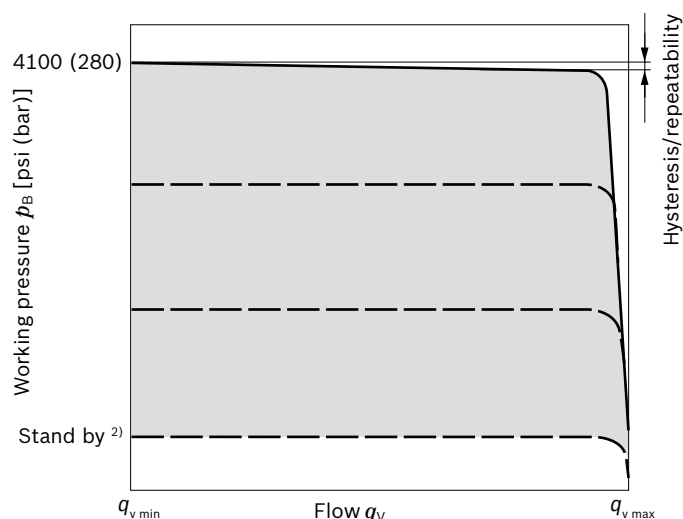

2) Zero stroke pressure from pressure setting Δp on controller **(2)**

The diagram illustrates a hydraulic circuit. A pump (1) is connected to a control valve (2). The control valve directs fluid to two actuators: a cylinder (3) and a motor. The cylinder is connected to a reservoir (L) and a tank (L1). The motor is connected to a tank (S). The control valve is also connected to a tank (X).

- 1** The separate pressure relief valve and the line are not included in the scope of delivery.
- 2** Remote controlled pressure cut-off **(G)**.
- 3** Pressure controller **(DR)**

- There is no valve for maximum internal pressure setting for size 140 DRG

Controller data DRG

NG		18	28	45	71	88	100	140
Hysteresis and repeatability	Δp [psi (bar)]	maximum 45 (3)						
Control fluid consumption DR and DRG	[gpm (l/min)]	maximum approx. 1.2 (4.5)						

DFR/DFR1/DRSC – Pressure flow controller


In addition to the pressure controller function (see page 13), a variable orifice (e.g. directional valve) is used to adjust the differential pressure upstream and downstream of the orifice. This is used to control the pump flow. The pump flow is equal to the actual hydraulic fluid quantity required by the consumer. With all controller combinations, the V_g reduction has priority.

- ▶ Basic position in depressurized state: $V_{g \max}$.
- ▶ Setting range¹⁾ to 4100 psi (280 bar).
- ▶ For pressure controller data see page 13


Notice

- ▶ The DFR1 version has no unloading between **X** and the reservoir. Unloading the LS-pilot line must be possible in the valve system. Because of the flushing function of the flow controller in the DFR1 control valve, sufficient unloading of the **X**-line must also be provided.

▼ Characteristic curve

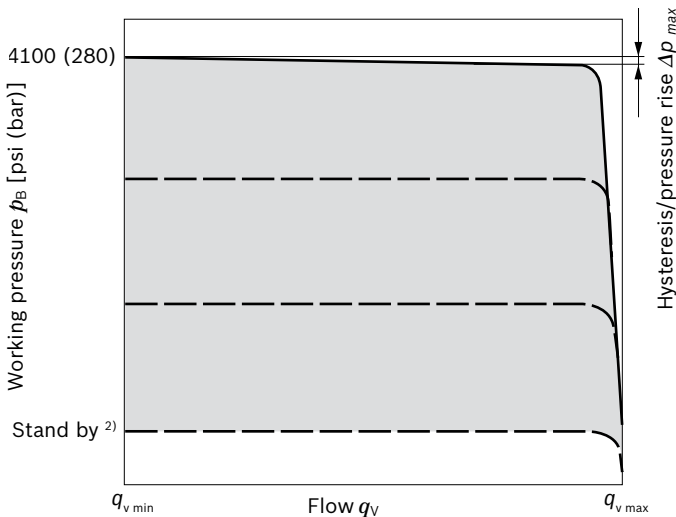


▼ Characteristic curve at variable rotational speed

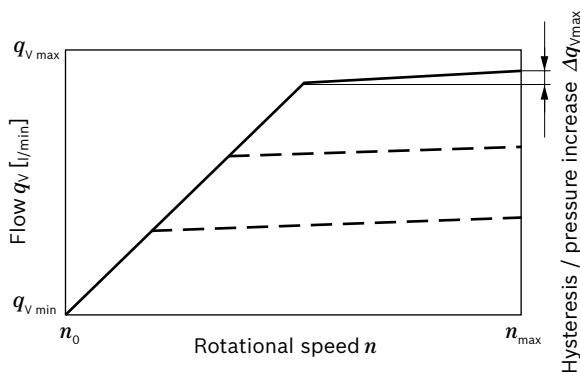


Characteristic curve valid at $n_1 = 1500$ rpm
and $\theta_{\text{fluid}} = 122^\circ \text{F}$ (50°C).

▼ Circuit diagram DFR size 18 to 100

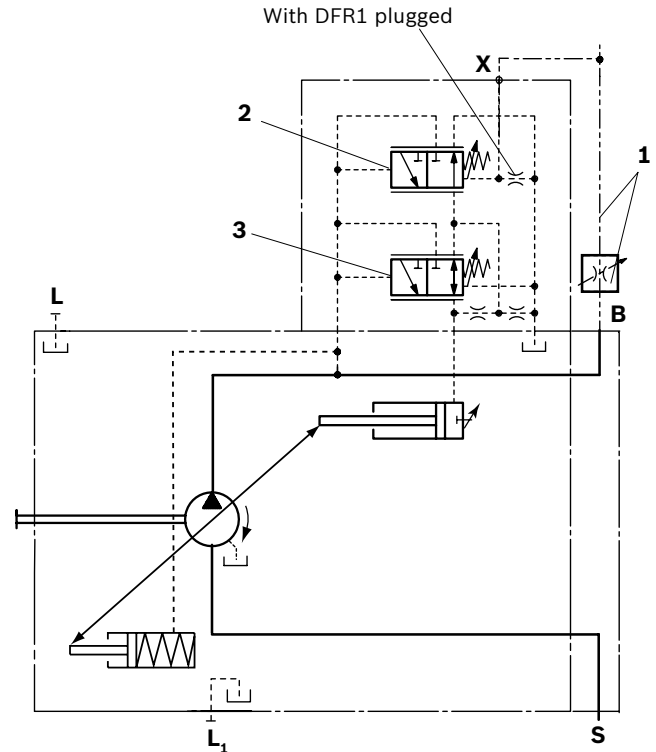

▼ Circuit diagram, size 140

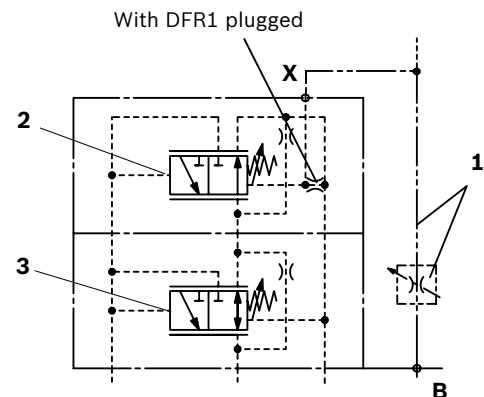

- 1 The metering orifice (control block) and the line is not included in the scope of delivery.
- 2 Pressure and flow controller (FR).
- 3 Pressure controller (DR)

For further information see page 16

- 1) In order to prevent damage to the pump and the system, the permissible setting range must not be exceeded. The range of possible settings at the valve is higher.
- 2) Zero stroke pressure from pressure setting Δp on controller (2)

Differential pressure Δp :

- ▶ Standard setting: 200 psi (14 bar)
If another setting is required, please state in plain text.
- ▶ Setting range: 200 to 320 psi (14 bar to 22 bar)

Relieving the load on port **X** to the reservoir results in a zero stroke (“standby”) pressure which lies about 15 to 30 psi (1 to 2 bar) higher than the defined differential pressure Δp , however, system influences are not taken into account.

Controller data


DR pressure controller data see page 13.
Maximum flow deviation measured at drive speed
n = 1500 rpm.

NG			18	28	45	71	88	100	140
Flow deviation	$\Delta q_{v \max}$	[gpm (l/min)]	0.20 (0.9)	0.30 (1.0)	0.50 (1.8)	0.70 (2.8)	0.90 (3.4)	1.10 (4.0)	1.60 (6.0)
Hysteresis and repeatability	Δp	[psi (bar)]	maximum 60 (4)						
Control fluid consumption		[gpm (l/min)]	maximum approx. 0.8 to 1.2 (3 to 4.5) (DFR) maximum approx. 0.8 (3) (DFR1/DRSC)						

DFLR – Pressure, flow and power control

Pressure controller equipped like DR, see page 13.
Equipment of the flow controller like DFR1, see page 15
In order to achieve a constant drive torque with varying working pressures, the swivel angle and with it the output flow from the axial piston pump is varied so that the product of flow and pressure remains constant.
Flow control is possible below the power control curve.


▼ Characteristic curve and torque characteristic

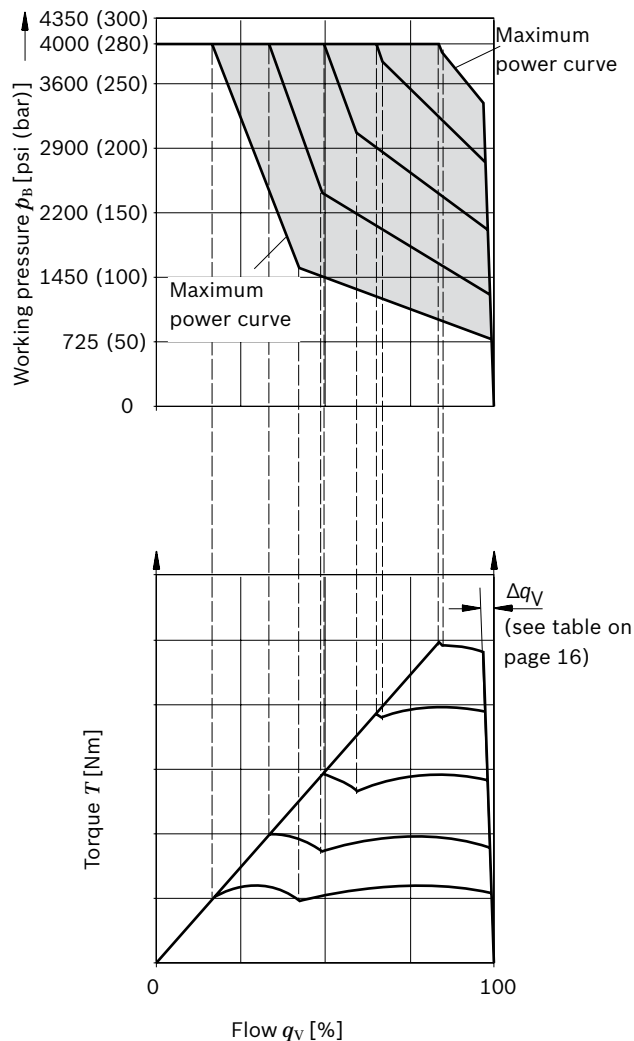


Please contact us regarding beginning of control at < 725 psi (50 bar)

When ordering please state the power characteristics to be set at the factory in plain text, e.g. 27 HP (20 kW) at 1500 rpm.

▼ Circuit diagram, sizes 28 to 100

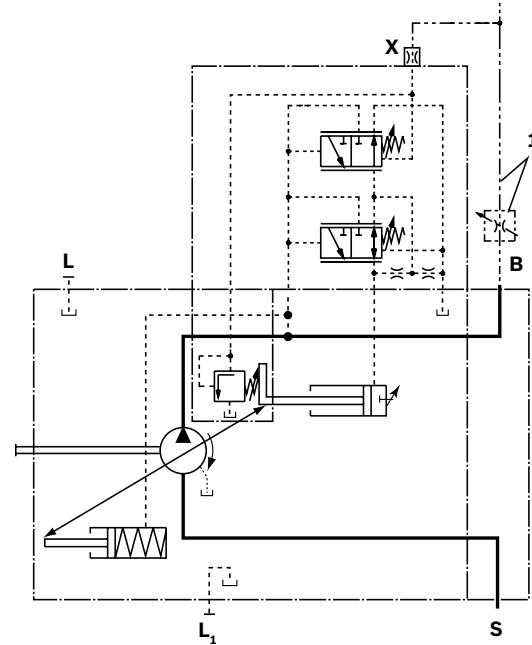

▼ Circuit diagram, size 140

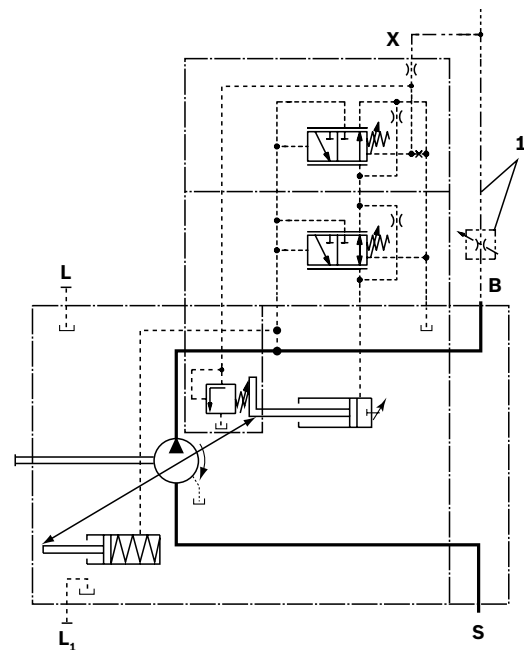

1 The metering orifice (control block) and the line is not included in the scope of delivery.

Controller data

For technical data of pressure controller DR see page 13.
For technical data of flow controller FR see page 16.
Control fluid consumption approx. 1.5 gpm (5.5 l/min) max.

ED – Electrohydraulic pressure control

The ED valve is set to a certain pressure by a specified variable solenoid current.

With changes on the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.


The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

As the solenoid current signal drops towards zero, the pressure will be limited to $p_{\max}$ by an adjustable hydraulic pressure cut-off (secure fail safe function in case of power failure, e.g. for fan speed control). The swivel time characteristic of the ED control was optimized for the use as a fan drive system.

When ordering, specify the type of application in plain text.


▼ Static current-pressure characteristic curve ED

(negative characteristic curve measured with pump in zero stroke)

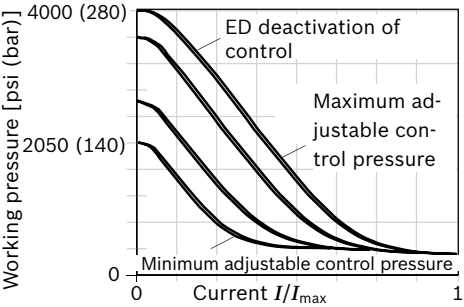

► Hysteresis static current-pressure characteristic curve < 45 psi (3 bar).

▼ Flow-pressure characteristic curve

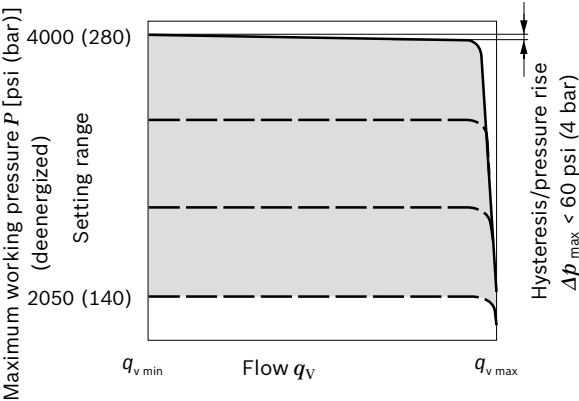


Characteristic curve valid at $n_1 = 1500$ rpm

and $\theta_{\text{fluid}} = 122$ °F (50 °C).


Control fluid consumption: 0.8 to 1.2 gpm (3 to 4.5 l/min).

For standby standard setting, see diagram on right, other values on request.

▼ Influence of the pressure setting on standby (maximally energized)

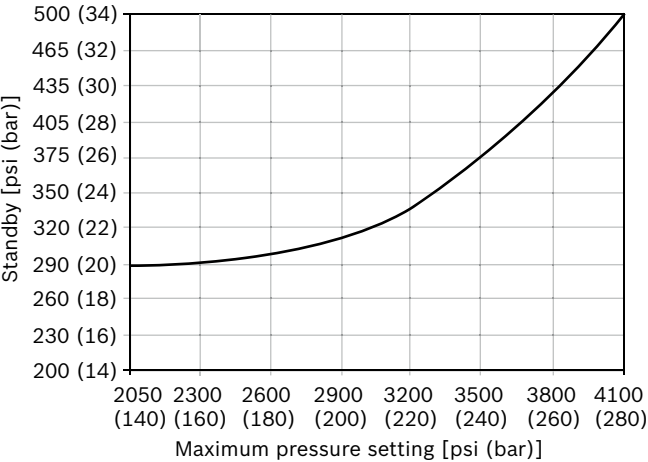

▼ Circuit diagram ED71/ED72

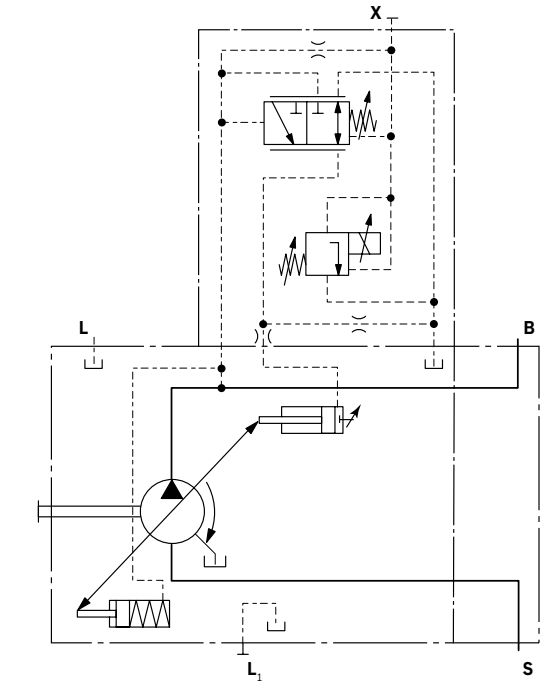

Technical data, solenoid	ED71	ED72
Voltage	12 V (±20%)	24 V (±20%)
Control current		
Start of control at $p_{\max}$	0 mA	0 mA
Start of control at $p_{\min}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100%	100%
Electronic controls and type of protection, see page 44		
Operating temperature range at valve -4 °F to +239 °F (-20 °C to +115 °C)		

ER – Electrohydraulic pressure control

The ER valve is set to a certain pressure by a specified variable solenoid current.

When changing the consumer (load pressure), this causes an increase or decrease in the pump swivel angle (flow) in order to maintain the electrically set pressure level.


The pump thus only delivers as much hydraulic fluid as the consumers can take. The desired pressure level can be set steplessly by varying the solenoid current.

If the solenoid current goes to zero, the pressure is limited to $p_{\min}$ (standby) by the adjustable, hydraulic pressure cut-off.

Observe project planning note.


▼ Current-pressure characteristic curve

(positive characteristic curve measured with pump in zero stroke)

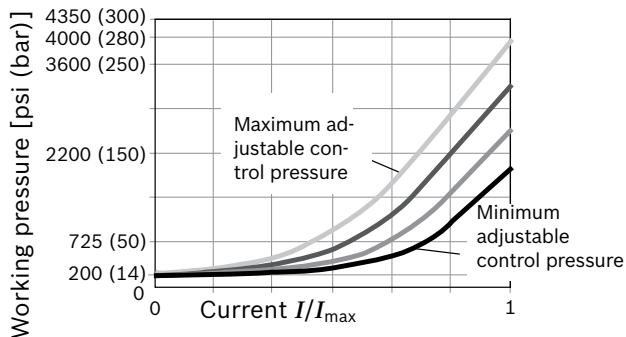

Hysteresis static < 45 psi (3 bar).


▼ Flow-pressure characteristic curve

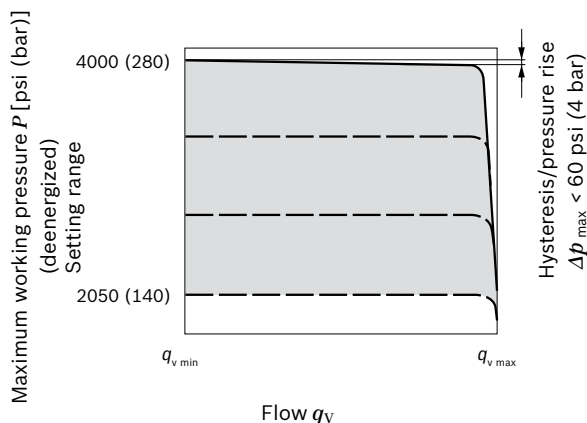

Characteristic curve valid at $n_1 = 1500$ rpm
and $\theta_{\text{fluid}} = 122$ °F (50 °C).

- Control fluid consumption: 0.8 to 1.2 gpm (3 to 4.5 l/min).
- Standby standard setting 200 psi (14 bar). Other values on request.
- Influence of pressure setting on stand by ± 30 psi (2 bar).

► Circuit diagram

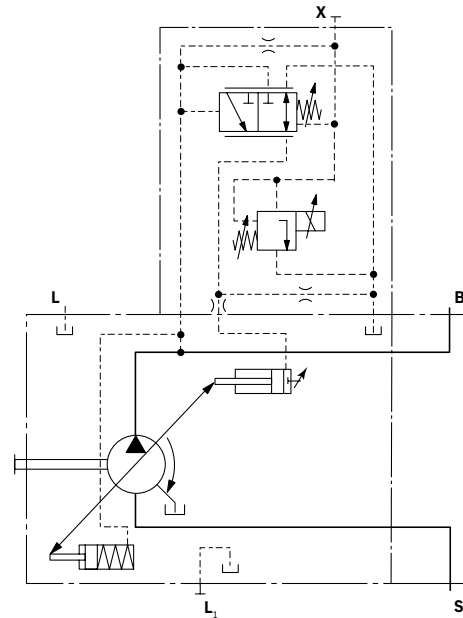

Technical data, solenoid	ER71	ER72
Voltage	12 V ($\pm 20\%$)	24 V ($\pm 20\%$)
Control current		
Start of control at $p_{\min}$	100 mA	50 mA
End of control at $p_{\max}$	1200 mA	600 mA
Current limit	1.54 A	0.77 A
Nominal resistance (at 20 °C)	5.5 Ω	22.7 Ω
Dither frequency	100 to 200 Hz	100 to 200 Hz
Duty cycle	100%	100%
Electronic controls and type of protection, see page 44		
Operating temperature range at valve -4 °F to +239 °F (-20 °C to +115 °C)		


Project planning note!

Excessive current levels ($I > 1200$ mA at 12 V or $I > 600$ mA at 24 V) to the ER solenoid can result in undesired pressure increases which can lead to pump or system damage. Therefore:


- Use $I_{\max}$ current limiter solenoids.
 - An intermediate plate pressure controller can be used to protect the pump in the event of overflow.
- An accessory kit with intermediate plate pressure controller can be ordered from Bosch Rexroth under part number R902490825.

Dimensions, size 18


DFR/DFR1 – Pressure flow controller, hydraulic, clockwise rotation

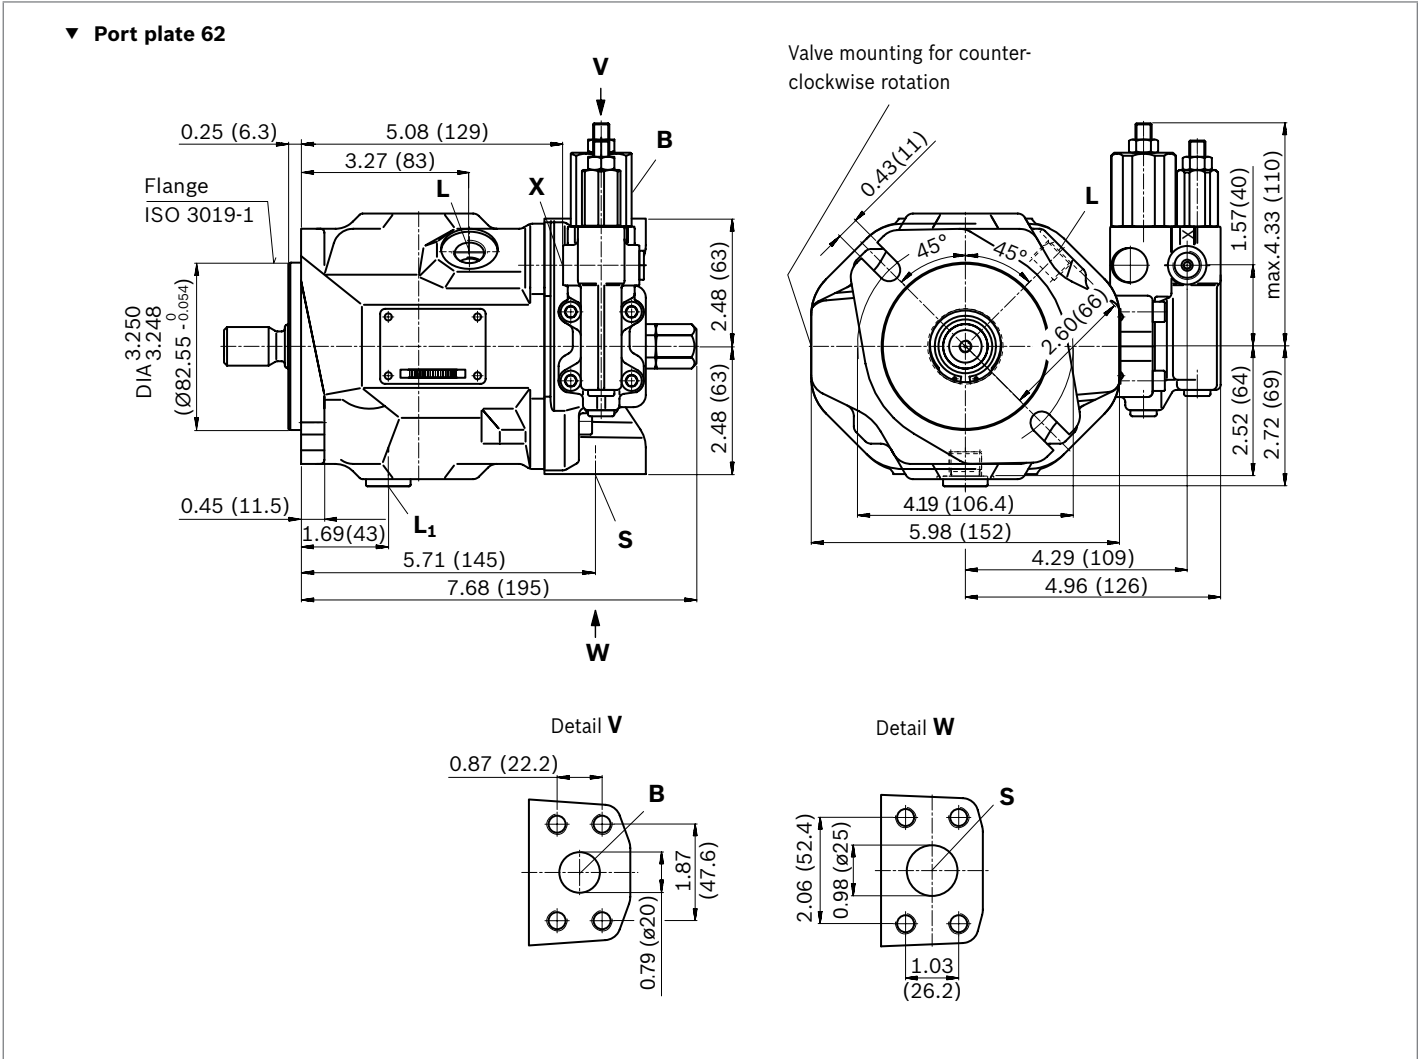


▼ Splined shaft 3/4 in (SAE J744)

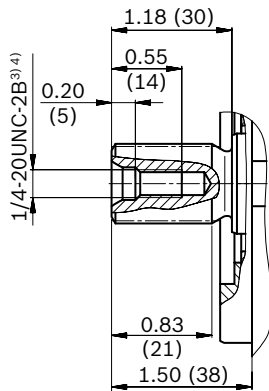S – 11T 16/32DP¹⁾


▼ Splined shaft 3/4 in (SAE J744)

R – 11T 16/32DP¹⁾²⁾

▼ Splined shaft 5/8 in (SAE J744)

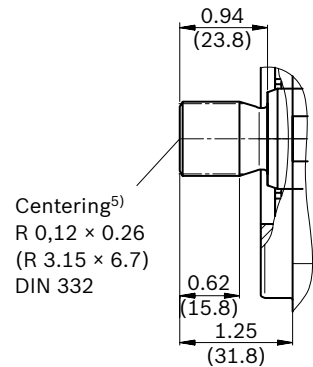U – 9T 16/32DP¹⁾

▼ Parallel keyed shaft, ISO 3019-1

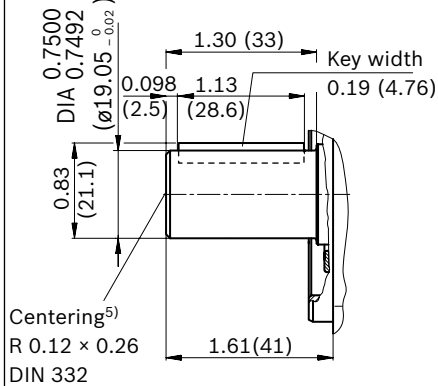
K – 19-1

Ports	Standard	Size ⁴⁾	$p_{\max \text{ abs}}$ [psi (bar)] ⁶⁾	State ⁹⁾
B Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	3/4 in 3/8-16 UNC-2B; 0.79 (20) deep	5100 (350)	O
S Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 in 3/8-16 UNC-2B; 0.79 (20) deep	145 (10)	O
L Drain port	ISO 11926 ⁷⁾	9/16-18 UNF-2B; 0.47 (12) deep	30 (2)	O ⁸⁾
L₁ Drain port	ISO 11926 ⁷⁾	9/16-18 UNF-2B; 0.47 (12) deep	30 (2)	X ⁸⁾
X Pilot pressure	ISO 11926	7/16-20 UNC-2B; 0.47 (12) deep	5100 (350)	O
X Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 0.47 (12) deep	5100 (350)	O


- 1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Splines according to ANSI B92.1a, spline runout is a deviation from standard.
- 3) Thread according to ASME B1.1
- 4) For notes on tightening torques, see the instruction manual
- 5) Coupling axially secured, e.g. with a clamp coupling or radially mounted clamping screw

- 6) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.
- 7) The countersink can be deeper than as specified in the standard.
- 8) Depending on the installation position, L or L₁ must be connected (also see installation instructions starting on page 45).
- 9) O = Must be connected (plugged when delivered)
X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

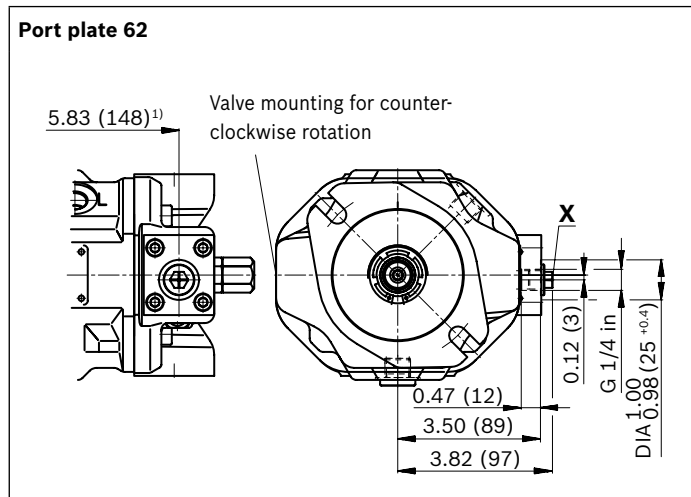


▼ **DR – Pressure controller**

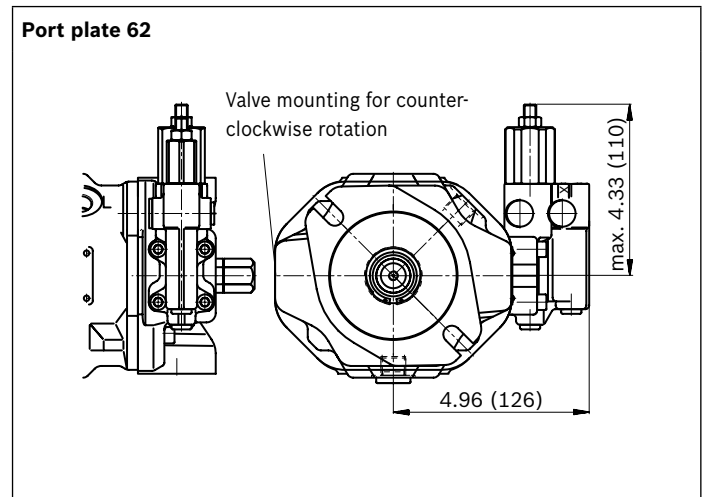

▼ **DRG – Pressure controller, remote controlled**

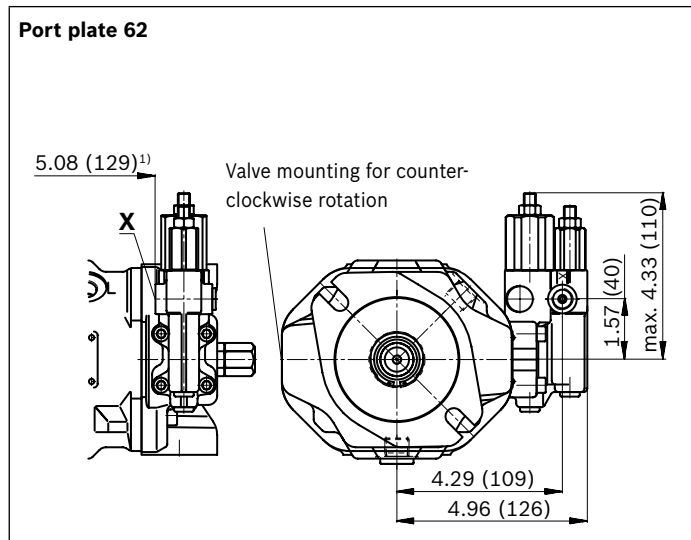

▼ **ED7.,ER7. – Electro-hydraulic pressure control**

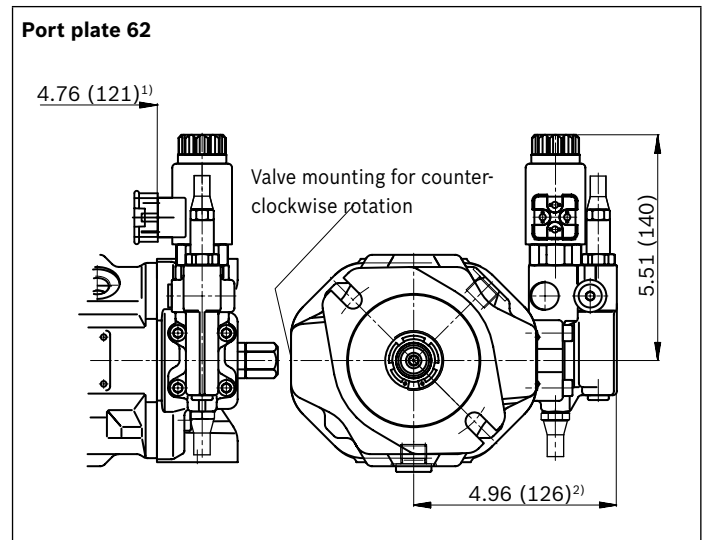


¹⁾ To flange surface

²⁾ ER7.: 6.34 inch (161 mm) if using an intermediate plate pressure controller


Dimensions, size 28

DFR/DFR1 – Pressure flow controller, hydraulic, clockwise rotation


▼ Port plate 62

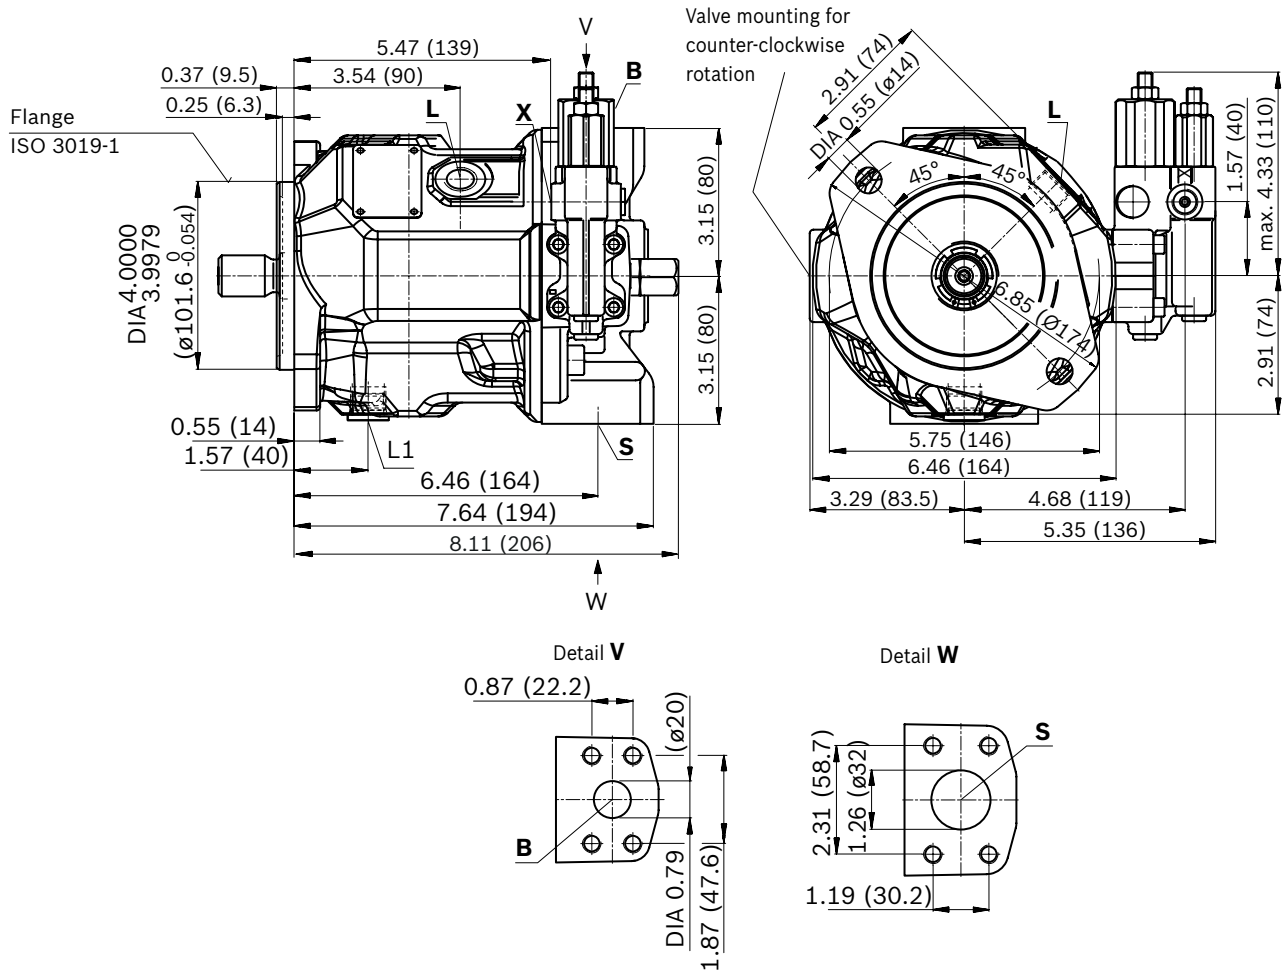


▼ Splined shaft 7/8 in (SAE J744)

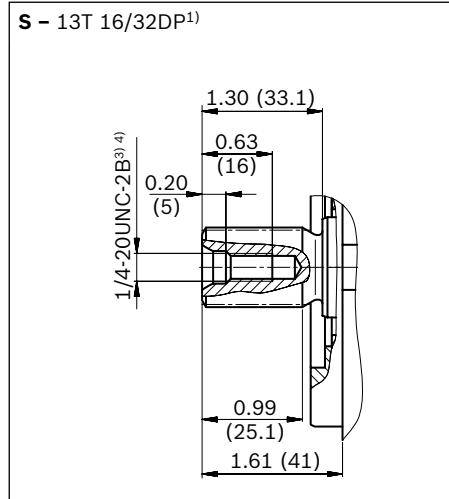

▼ Splined shaft 7/8 in (SAE J744)

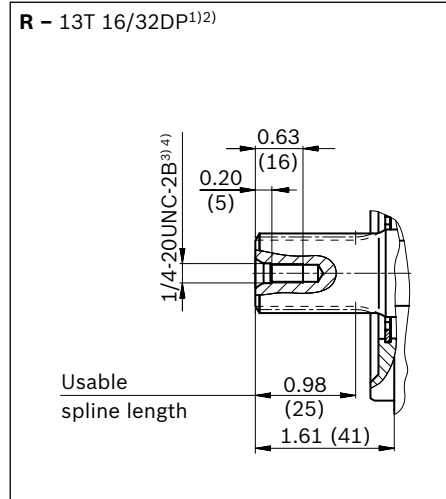

▼ Parallel keyed shaft, ISO 3019-1

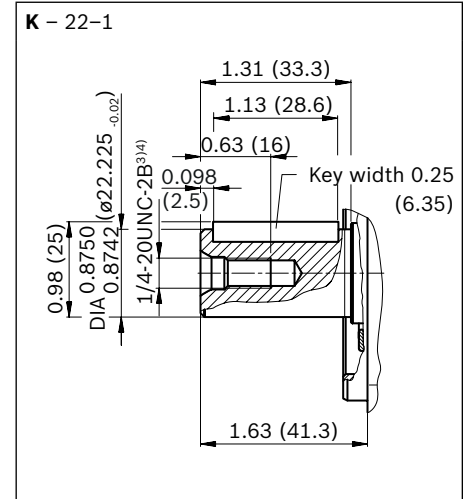


Ports	Standard	Size ⁴⁾	$p_{\max \text{ abs}}$ [psi (bar)] ⁵⁾	State ⁸⁾
B Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	3/4 in 3/8-16 UNC-2B; 0.79 (20) deep	5100 (350)	O
S Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/4 in 7/16-14 UNC-2B; 0.94 (24) deep	145 (10)	O
L Drain port	ISO 11926 ⁶⁾	3/4-16 UNF-2B; 0.47 (12) deep	30 (2)	O ⁷⁾
L₁ Drain port	ISO 11926 ⁶⁾	3/4-16 UNF-2B; 0.47 (12) deep	30 (2)	X ⁷⁾
X Pilot pressure	ISO 11926	7/16-20 UNC-2B; 0.47 (12) deep	5100 (350)	O
X Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 0.47 (12) deep	5100 (350)	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Splines according to ANSI B92.1a, spline runout is a deviation from standard.
3) Thread according to ASME B1.1
4) For notes on tightening torques, see the instruction manual
5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) The countersink can be deeper than as specified in the standard.
7) Depending on the installation position, L or L₁ must be connected (also see installation instructions starting on page 45).
8) O = Must be connected (plugged when delivered)
X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

Port plate 62

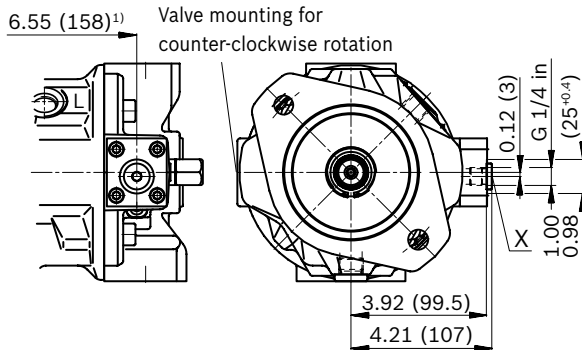


▼ **DFLR – Pressure, flow and power controller**

Port plate 62

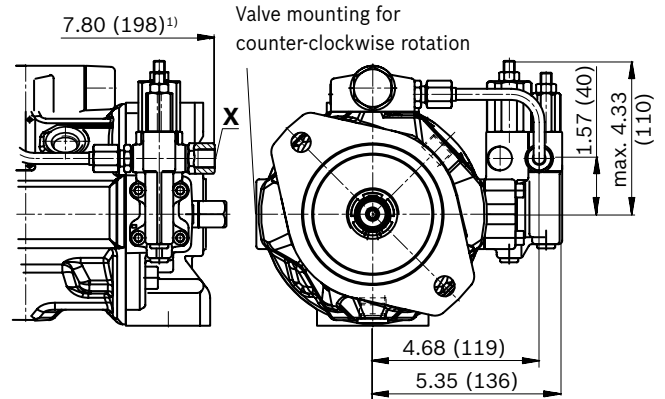


▼ **DR – Pressure controller**

Port plate 62

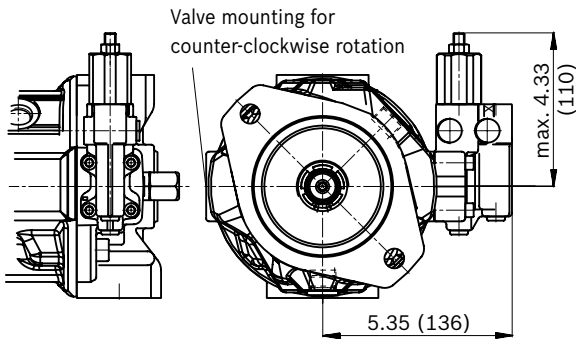


▼ **DRG – Pressure controller, remote controlled**

Port plate 62

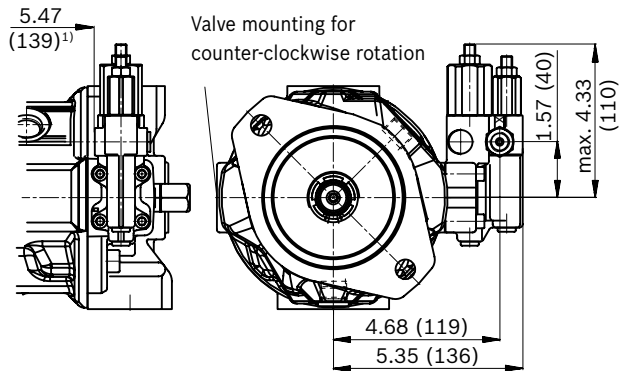

▼ **ED7., ER7. – Electrohydraulic pressure control**

Port plate 62

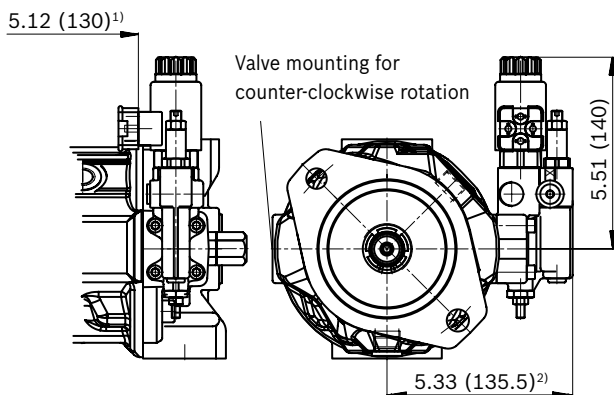


1) To flange surface


2) ER7.: 6.71 inch (170.5 mm) if using an intermediate plate pressure controller

Dimensions, size 45


DFR/DFR1 – Pressure flow controller, hydraulic, clockwise rotation

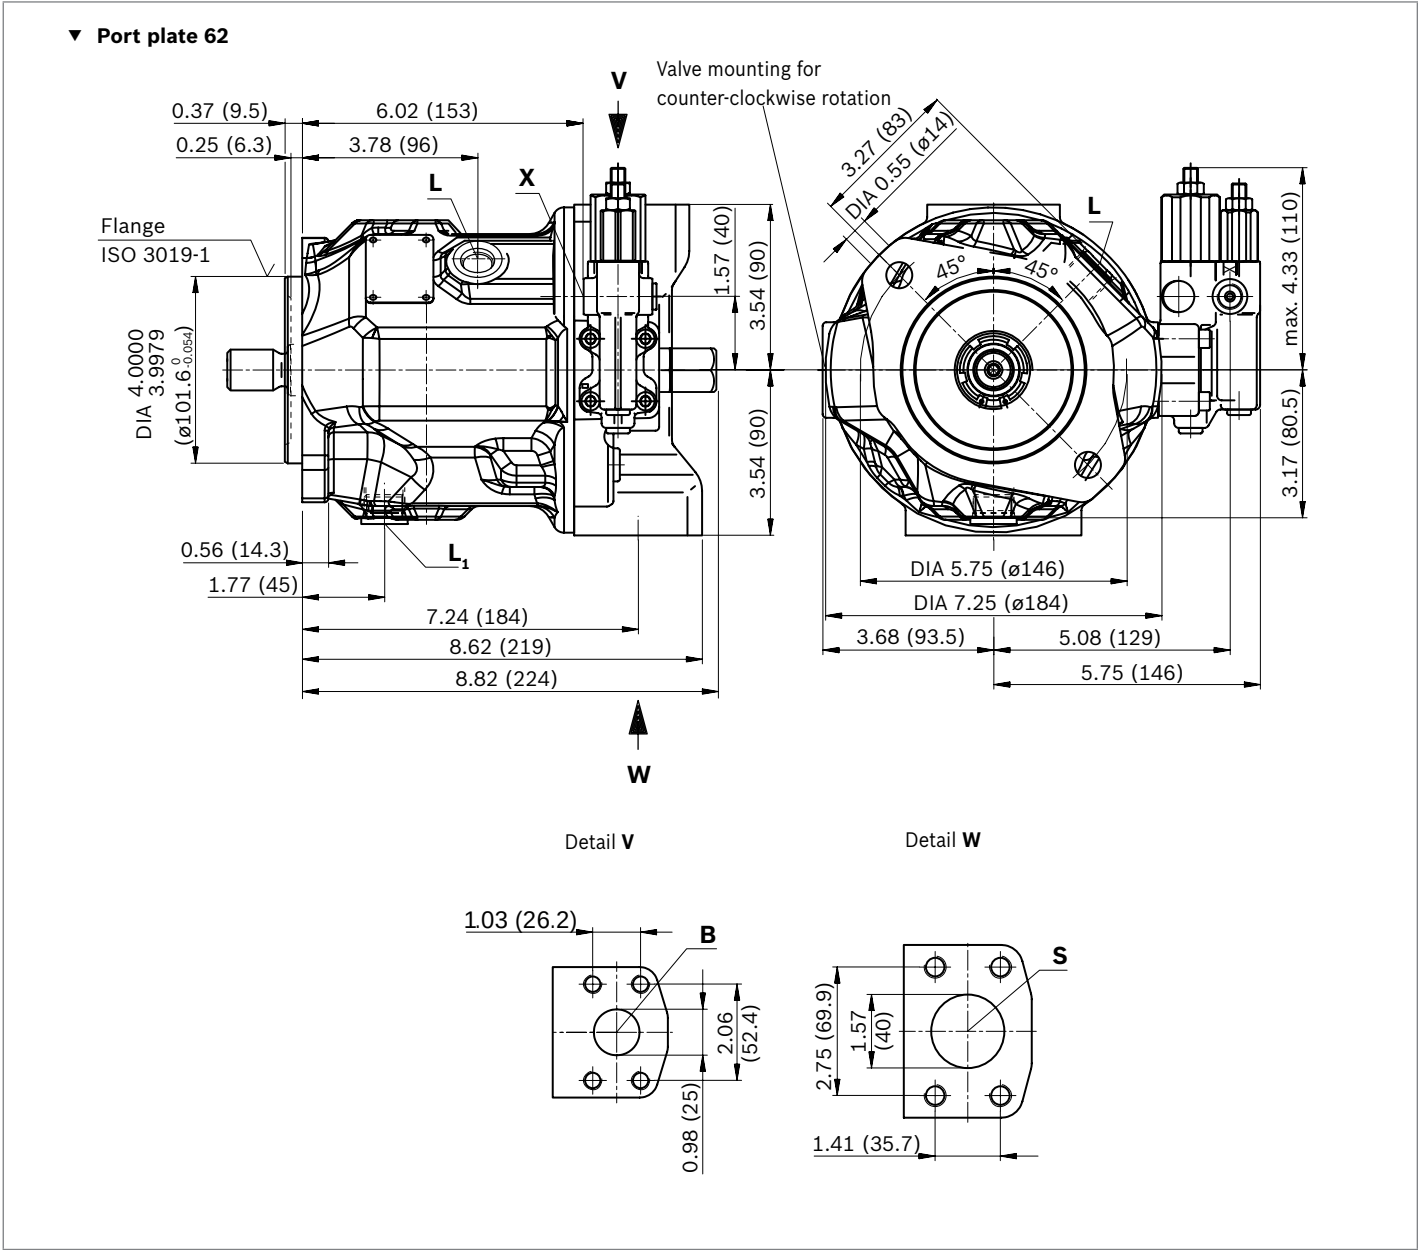


▼ Splined shaft 1 in (SAE J744)

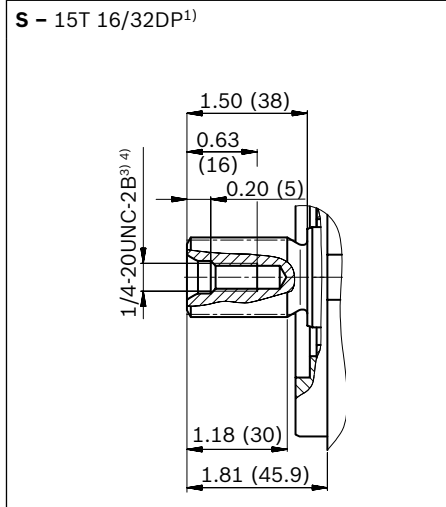

▼ Splined shaft 1 in (SAE J744)

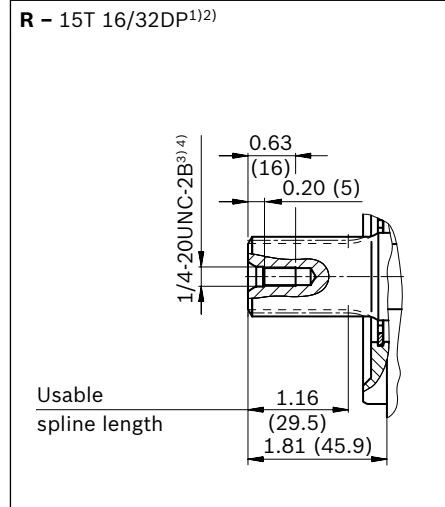

▼ Parallel keyed shaft, ISO 3019-1

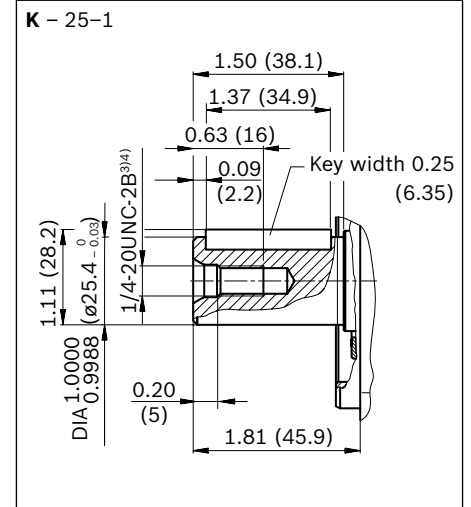


Ports		Standard	Size ⁴⁾	$p_{\max \text{ abs}}$ [psi (bar)] ⁵⁾	State ⁸⁾
B	Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 in 3/8-16 UNC-2B; 0.71 (18) deep	5100 (350)	O
S	Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/2 in 1/2-13 UNC-2B; 0.87 (22) deep	145 (10)	O
L	Drain port	ISO 11926 ⁶⁾	7/8 14 UNF-2B; 0.55 (14) deep	30 (2)	O ⁷⁾
L₁	Drain port	ISO 11926 ⁶⁾	7/8 14 UNF-2B; 0.55 (14) deep	30 (2)	X ⁷⁾
X	Pilot pressure	ISO 11926	7/16-20 UNC-2B; 0.47 (12) deep	5100 (350)	O
X	Pilot pressure with DG-control	DIN ISO 228	G1/4 in	5100 (350)	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Splines according to ANSI B92.1a, spline runout is a deviation from standard.
3) Thread according to ASME B1.1
4) For notes on tightening torques, see the instruction manual
5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) The countersink can be deeper than as specified in the standard.
7) Depending on the installation position, L or L₁ must be connected (also see installation instructions starting on page 45).
8) O = Must be connected (plugged when delivered)
X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

Port plate 62

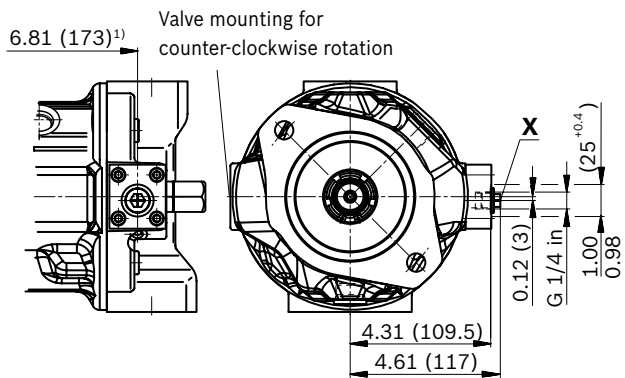


▼ **DFLR – Pressure, flow and power controller**

Port plate 62

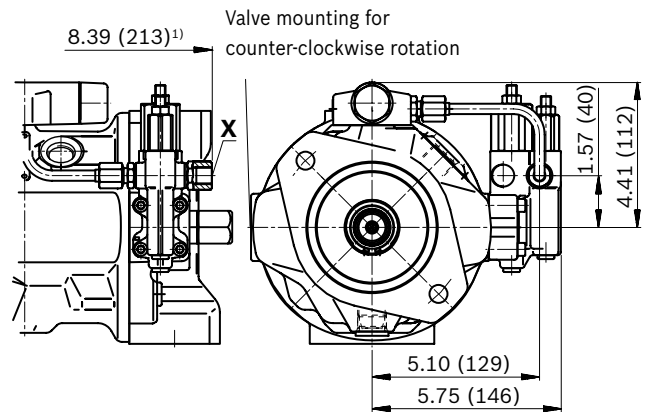


▼ **DR – Pressure controller**

Port plate 62

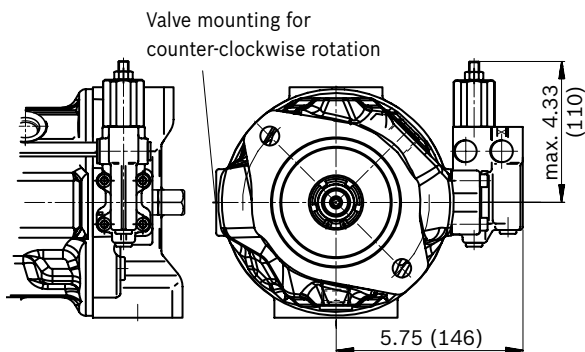


▼ **DRG – Pressure controller, remote controlled**

Port plate 62

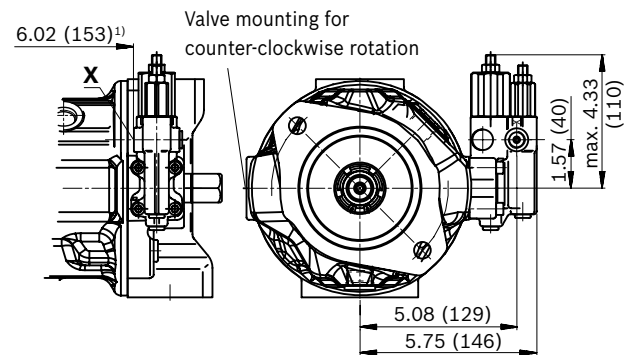

▼ **ED7., ER7. – Electrohydraulic pressure control**

Port plate 62

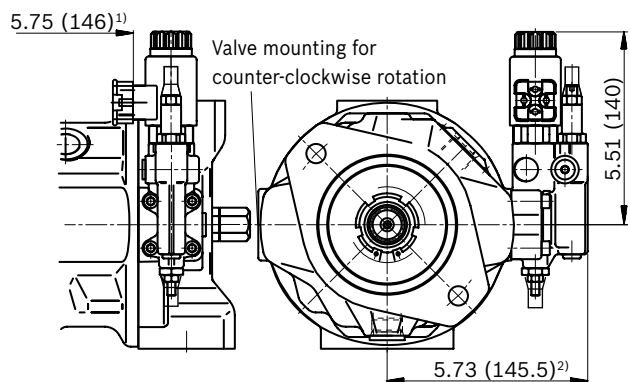


¹⁾ To flange surface

²⁾ ER7.: 7.11 in (180.5 mm) if using an intermediate plate pressure controller

Dimensions sizes 71 and 88


DFR/DFR1 – Pressure flow controller, hydraulic, clockwise rotation

▼ Port plate 92

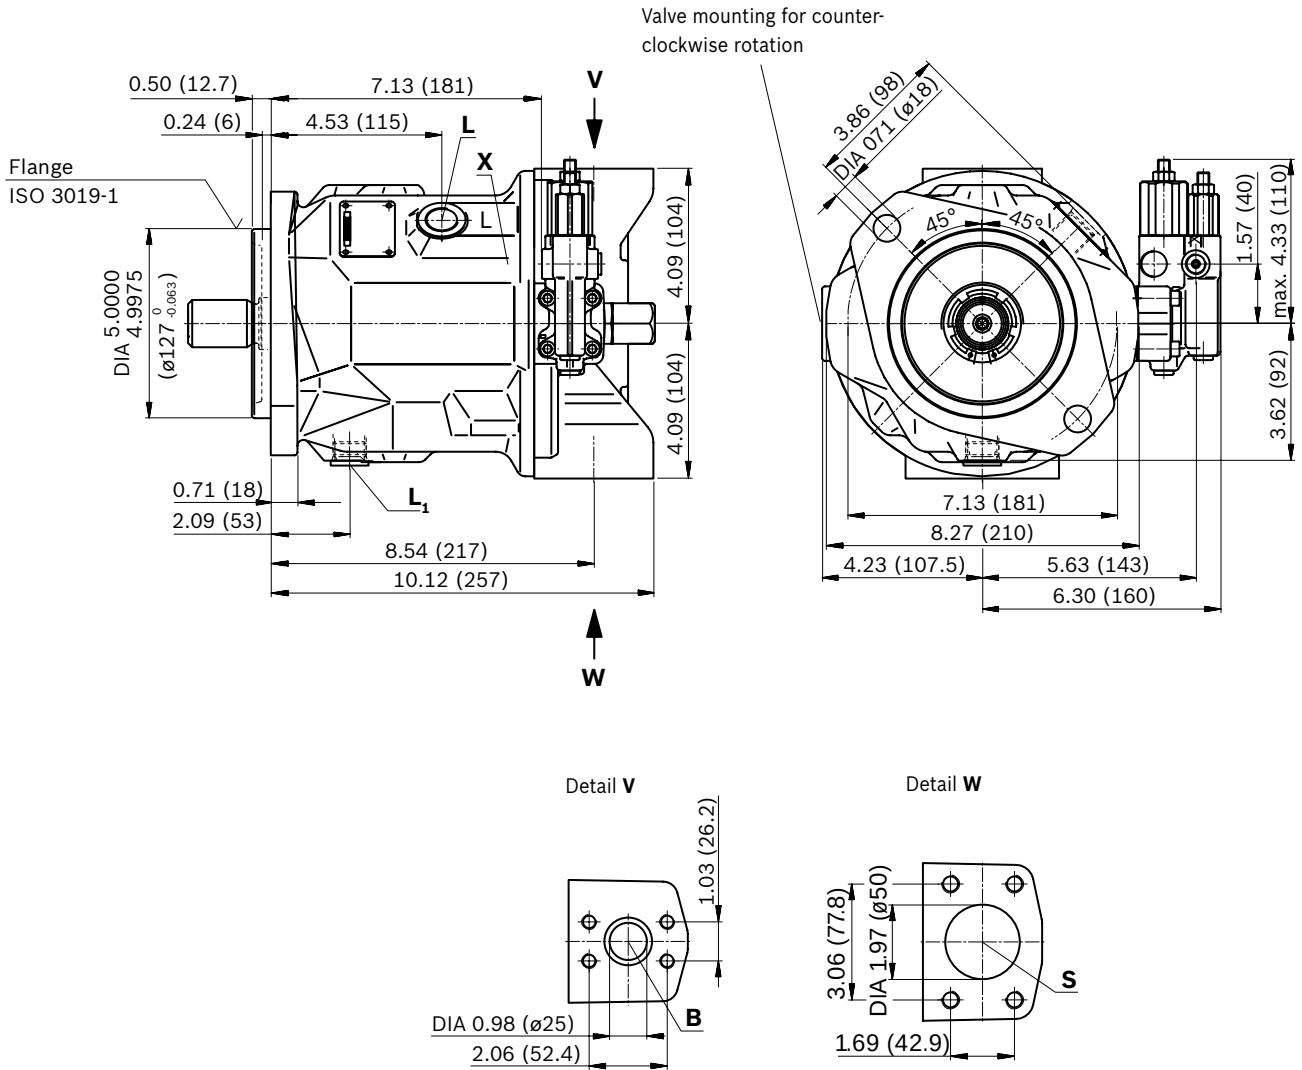


▼ **Splined shaft 1 1/4 in (SAE J744)**

S – 14T 12/24DP¹⁾

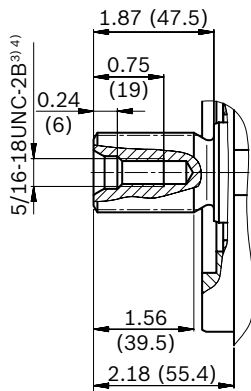


▼ **Splined shaft 1 1/4 in (SAE J744)**

R – 14T 12/24DP¹⁾²⁾

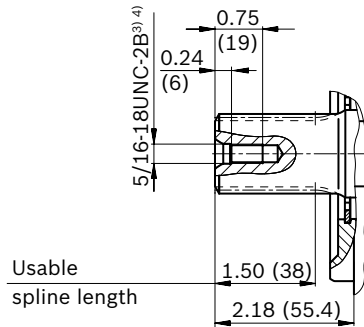

▼ **Parallel keyed shaft, ISO 3019-1**

K – 32-1

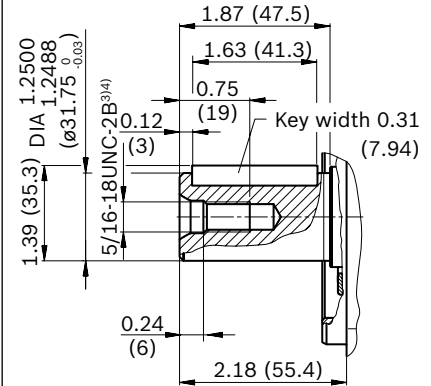


Ports	Standard	Size ⁴⁾	$p_{\max \text{ abs}}$ [psi (bar)] ⁵⁾	State ⁸⁾
B Working port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	1 in 3/8-16 UNC-2B; 0.71 (18) deep	5100 (350)	O
S Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	2 in 1/2-13 UNC-2B; 0.87 (22) deep	145 (10)	O
L Drain port	ISO 11926 ⁶⁾	7/8 14 UNF-2B; 0.55 (14) deep	30 (2)	O ⁷⁾
L₁ Drain port	ISO 11926 ⁶⁾	7/8 14 UNF-2B; 0.55 (14) deep	30 (2)	X ⁷⁾
X Pilot pressure	ISO 11926	7/16-20 UNC-2B; 0.45 (11.5) deep	5100 (350)	O
X Pilot pressure with DG-control	DIN ISO 228	G1/4 in	5100 (350)	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Splines according to ANSI B92.1a, spline runout is a deviation from standard.
3) Thread according to ASME B1.1
4) For notes on tightening torques, see the instruction manual
5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) The countersink can be deeper than as specified in the standard.
7) Depending on the installation position, L or L₁ must be connected (also see installation instructions starting on page 45).
8) O = Must be connected (plugged when delivered)
X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

Port plate 92

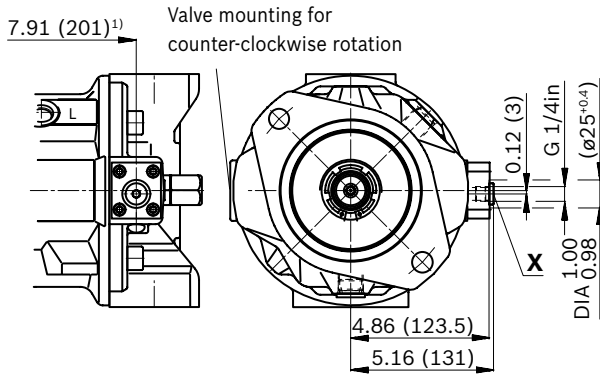


▼ **DFLR – Pressure, flow and power controller**

Port plate 92

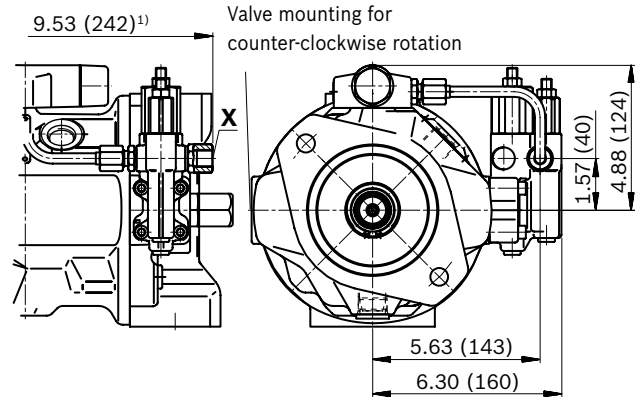


▼ **DR – Pressure controller**

Port plate 92

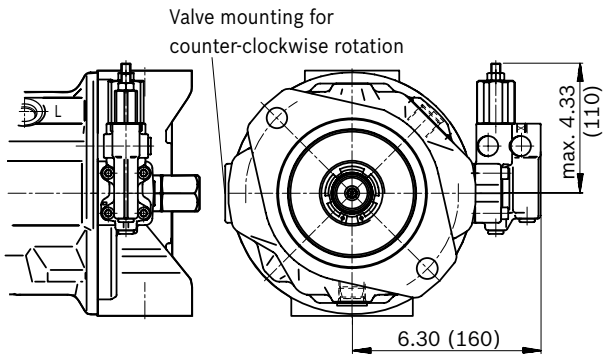


▼ **DRG – Pressure controller, remote controlled**

Port plate 92

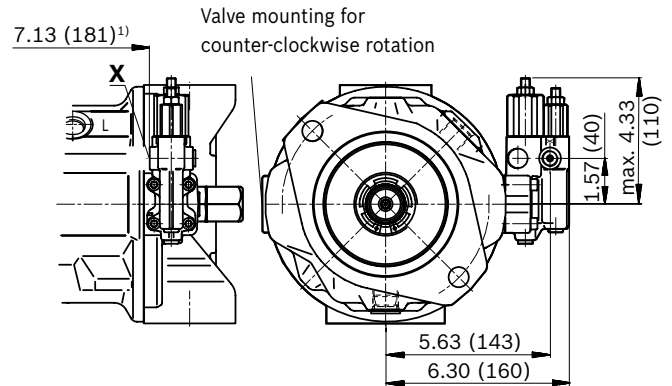

▼ **ED7., ER7. – Electrohydraulic pressure control**

Port plate 92

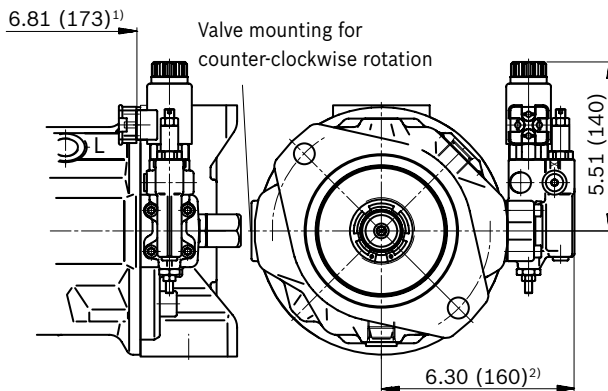


1) To flange surface

2) ER7.: 7.68 in (195 mm) if using an intermediate plate pressure controller


Dimensions, size 100

DFR/DFR1 – Pressure flow controller, hydraulic, clockwise rotation

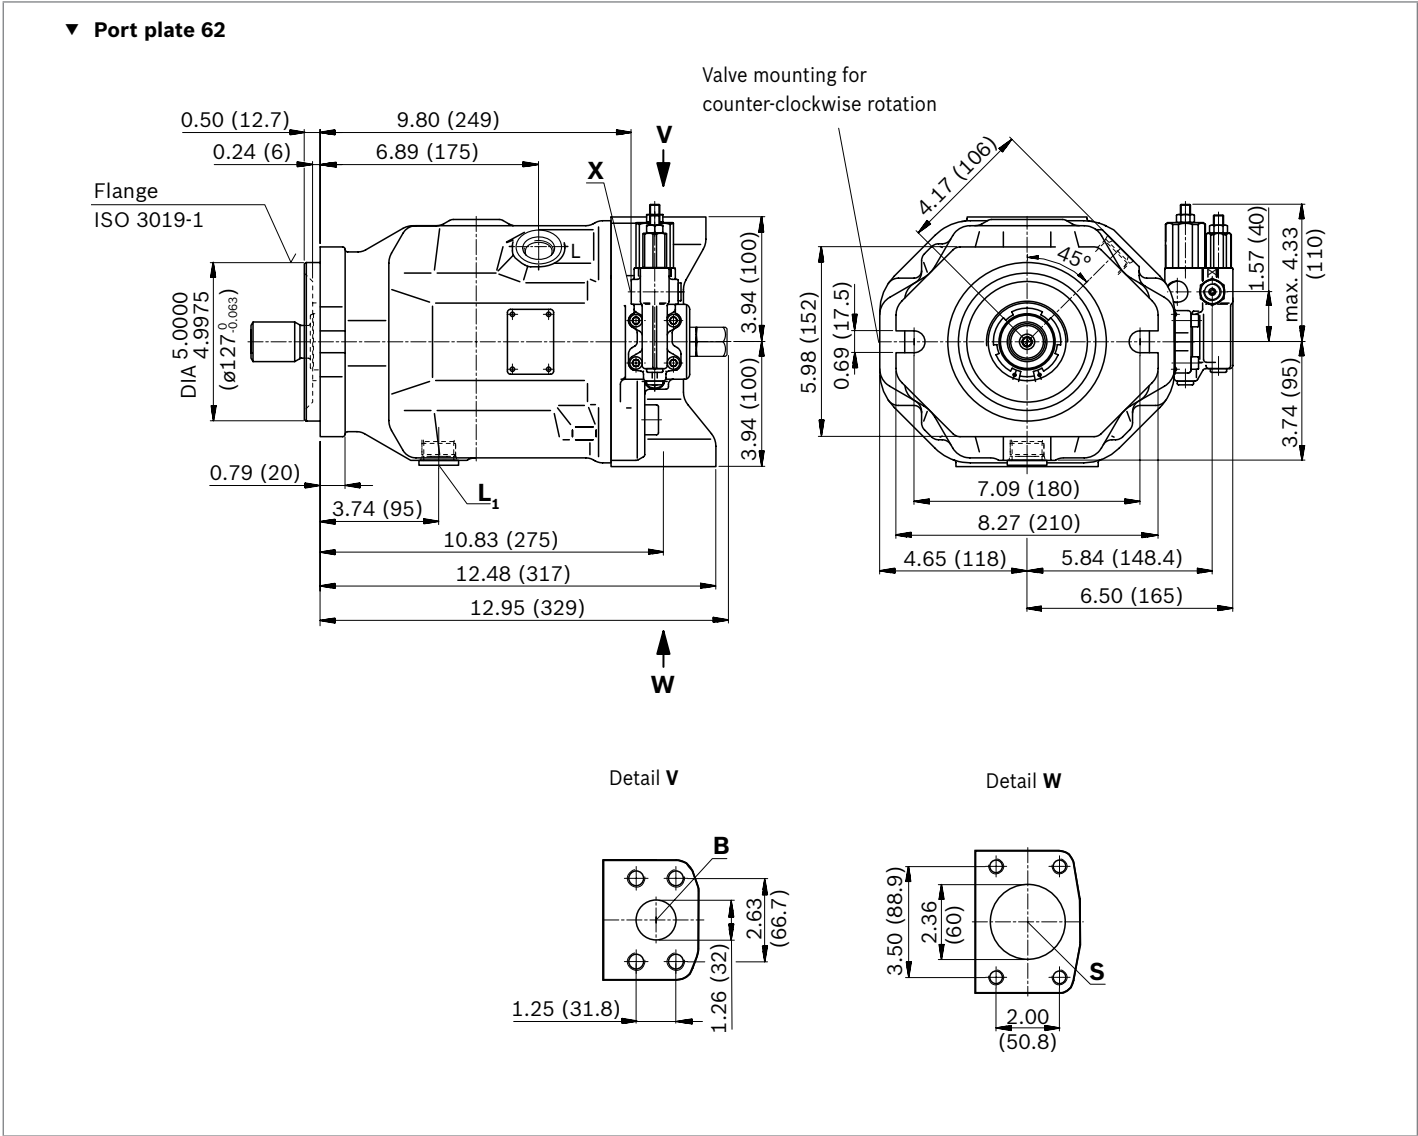


▼ Splined shaft 1 1/2 in (SAE J744)

S – 17T 12/24DP¹⁾

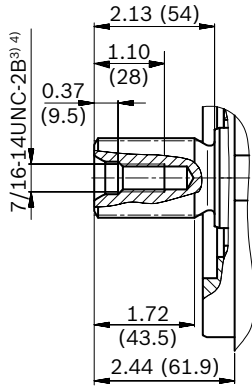


▼ Splined shaft 1 1/4 in (SAE J744)

U – 14T 12/24DP¹⁾²⁾

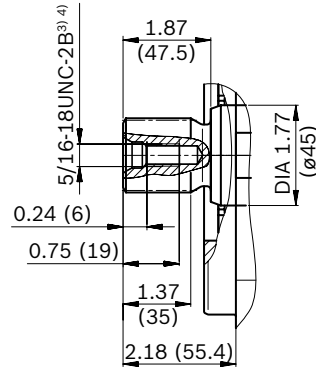

▼ Parallel keyed shaft, ISO 3019-1


K – 38-1

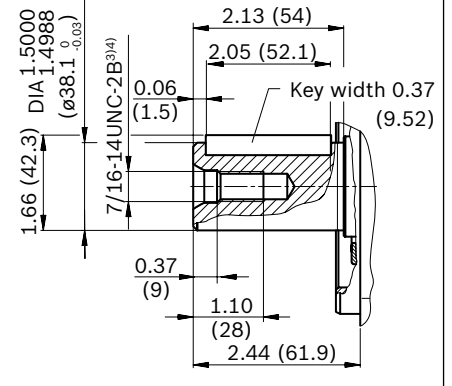

Ports	Standard	Size ⁴⁾	$p_{\max \text{ abs}}$ [psi (bar)] ⁵⁾	State ⁸⁾
B Working port (high pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/4 in 1/2-13 UNC-2B; 0.75 (19) deep	5100 (350)	O
S Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	2 1/2 in 1/2-13 UNC-2B; 1.06 (27) deep	145 (10)	O
L Drain port	ISO 11926 ⁶⁾	1 1/16 12 UNF-2B; 0.63 (16) deep	30 (2)	O ⁷⁾
L₁ Drain port	ISO 11926 ⁶⁾	1 1/16 12 UNF-2B; 0.63 (16) deep	30 (2)	X ⁷⁾
X Pilot pressure	ISO 11926	7/16-20 UNC-2B; 0.45 (11.5) deep	5100 (350)	O
X Pilot pressure with DG-control	DIN ISO 228	G1/4 in; 0.47 (12) deep	5100 (350)	O

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Splines according to ANSI B92.1a, spline runout is a deviation from standard.
3) Thread according to ASME B1.1
4) For notes on tightening torques, see the instruction manual
5) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

6) The countersink can be deeper than as specified in the standard.
7) Depending on the installation position, L or L₁ must be connected (also see installation instructions starting on page 45).
8) O = Must be connected (plugged when delivered)
X = Plugged (in normal operation)



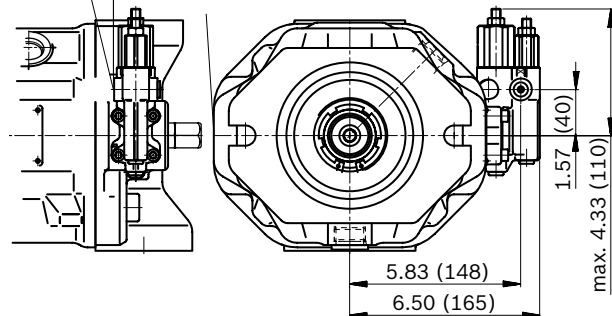


Dimensions, size 140

DFR/DFR1 – Pressure flow controller, hydraulic, clockwise rotation, mounting flange D and C


▼ Port plate 62

Mounting flange D

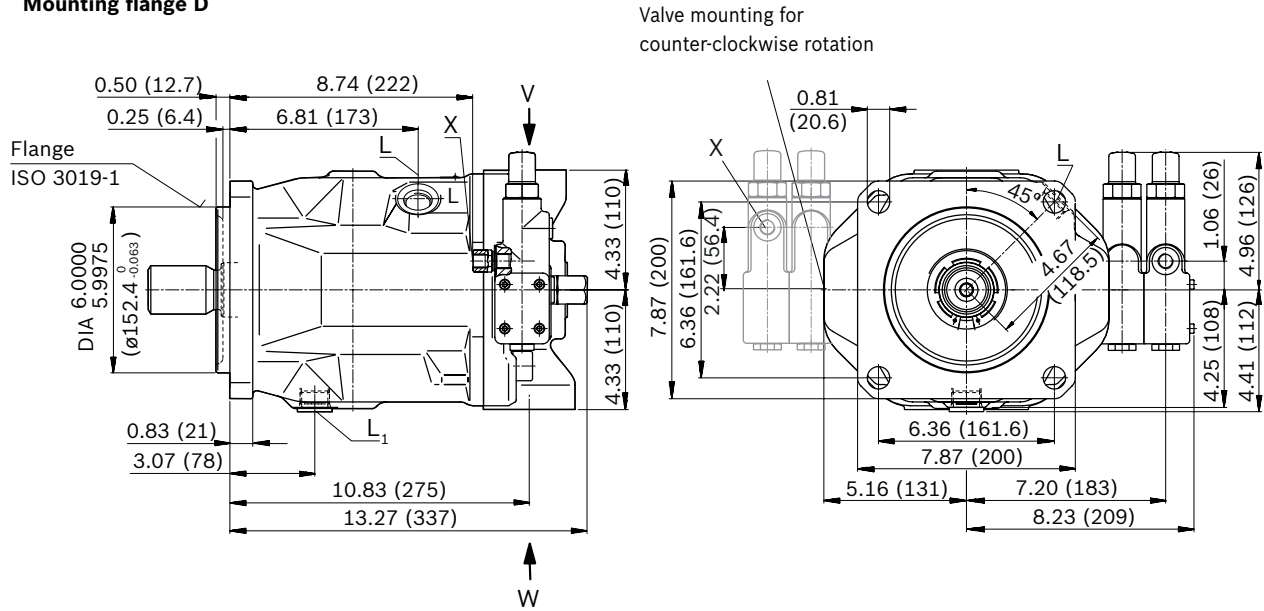


▼ Port plate 62


Mounting flange C

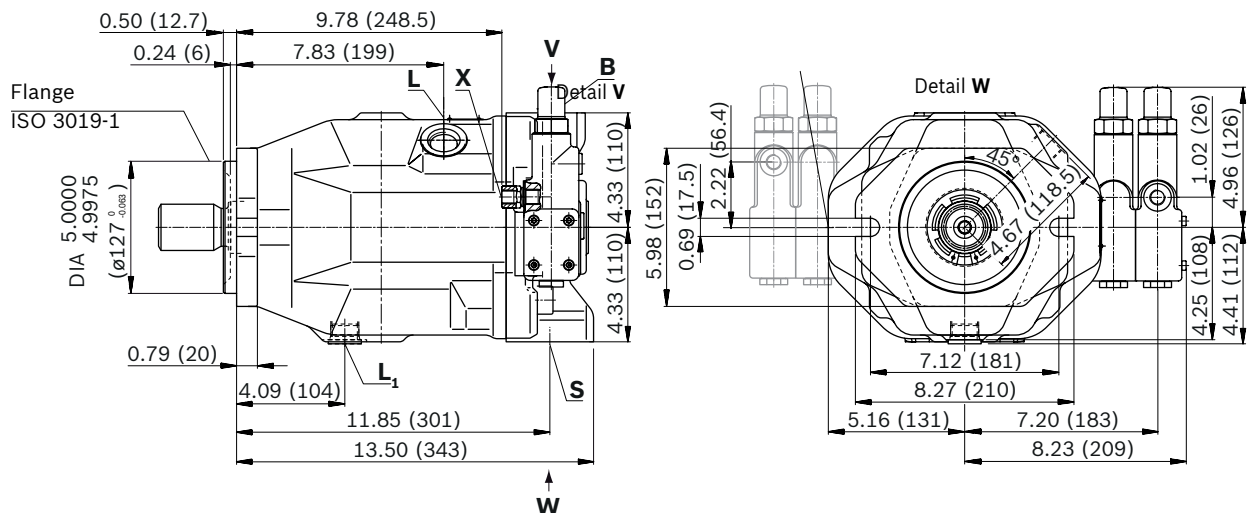

▼ **Splined shaft 1 3/4 in (SAE J744)**

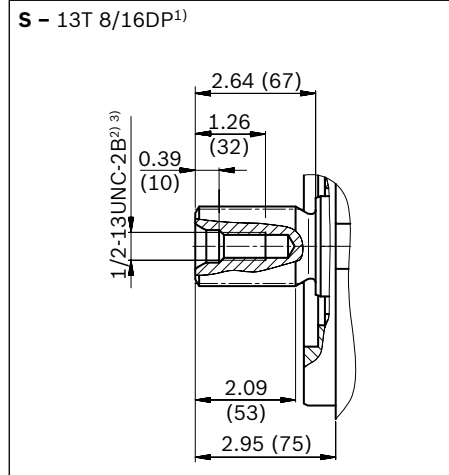

▼ **Parallel keyed shaft, ISO 3019-1**

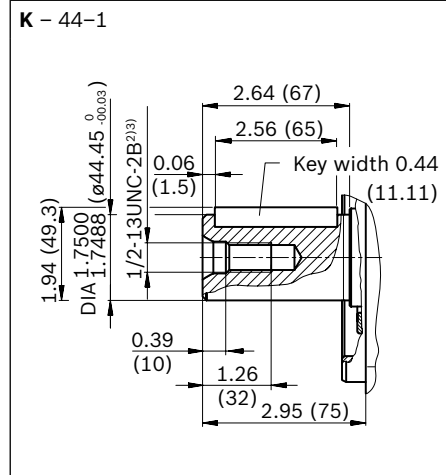


Ports	Standard	Size ³⁾	$p_{\max \text{ abs}}$ [psi (bar)] ⁴⁾	State ⁷⁾
B Working port (high pressure series) Fastening thread	SAE J518 ASME B1.1	1 1/4 in 1/2-13 UNC-2B; 0.94 (24) deep	5100 (350)	O
S Suction port (standard pressure series) Fastening thread	SAE J518 ASME B1.1	2 1/2 in 1/2-13 UNC-2B; 0.94 (24) deep	145 (10)	O
L Drain port	ISO 11926 ⁵⁾	1 1/16 12 UNF-2B; 0.71 (18) deep	30 (2)	O ⁶⁾
L₁ Drain port	ISO 11926 ⁵⁾	1 1/16 12 UNF-2B; 0.71 (18) deep	30 (2)	X ⁶⁾
X Pilot pressure	ISO 11926	9/16-18 UNF-2B; 0.51 (13) deep	5100 (350)	O
X Pilot pressure with DG-control	DIN ISO 228	M14 x 1.5; 0.47 (12) deep	5100 (350)	O
M_H High pressure measurement (only with control DG)	DIN 3852	M14 x 1.5; 0.47 (12) deep	5100 (350)	X

1) Involute spline according to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Thread according to ASME B1.1
3) For notes on tightening torques, see the instruction manual
4) Depending on the application, momentary pressure peaks can occur. Keep this in mind when selecting measuring devices and fittings.

5) The countersink can be deeper than as specified in the standard.
6) Depending on the installation position, L or L₁ must be connected (also see installation instructions starting on page 45).
7) O = Must be connected (plugged when delivered)
X = Plugged (in normal operation)


▼ **DG – Two-point control, direct operated**

Port plate 62; mounting flange D

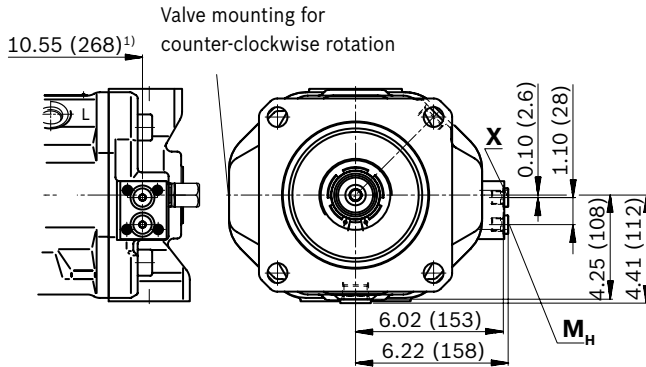


▼ **DFLR – Pressure, flow and power controller**

Port plate 62; mounting flange D

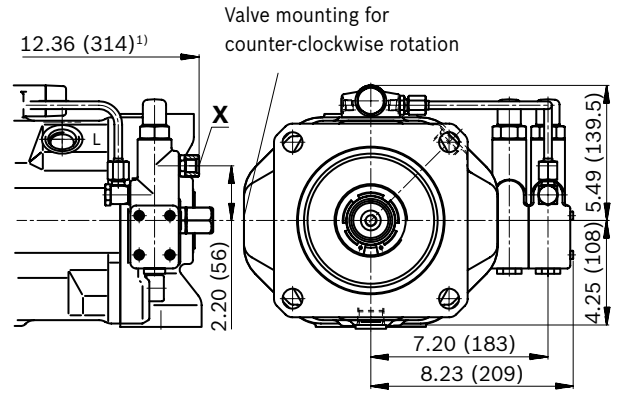


▼ **DR – Pressure controller**

Port plate 62; mounting flange D

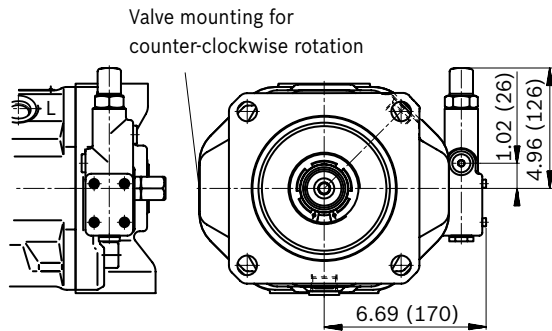


▼ **DRG – Pressure controller, remote controlled**

Port plate 62; mounting flange D

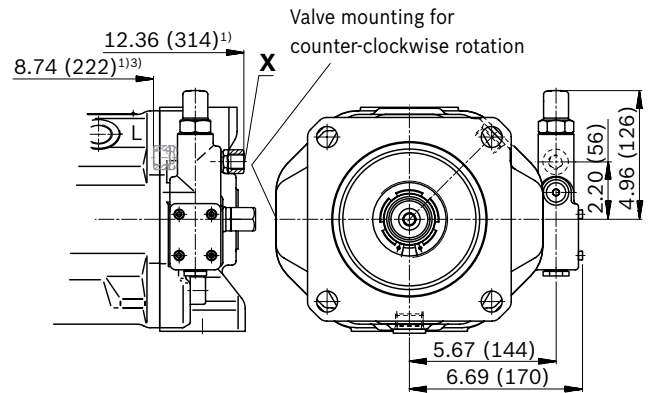

▼ **ED7., ER7. – Electrohydraulic pressure control**

Port plate 62; mounting flange D

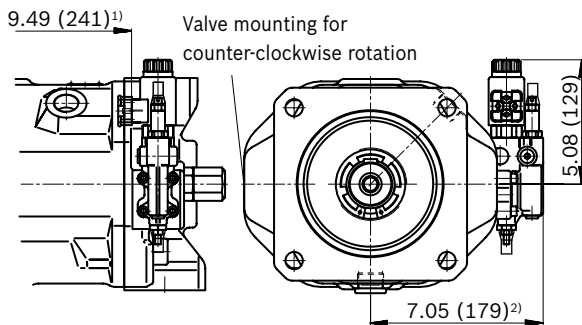

1) To flange surface

2) ER7.: 8.43 in (214 mm) if using an intermediate plate pressure controller


3) For counter-clockwise rotation

Dimensions, through drive


Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability over sizes							Code
Diameter	Symbol	Diameter		18	28	45	71	88	100	140	
82-2 (A)	⌀, ♂, ∞	5/8 in	9T 16/32DP	●	●	●	●	●	●	●	K01
		3/4 in	11T 16/32DP	●	●	●	●	●	●	●	K52

• = Available - = Not available

▼ 82-2

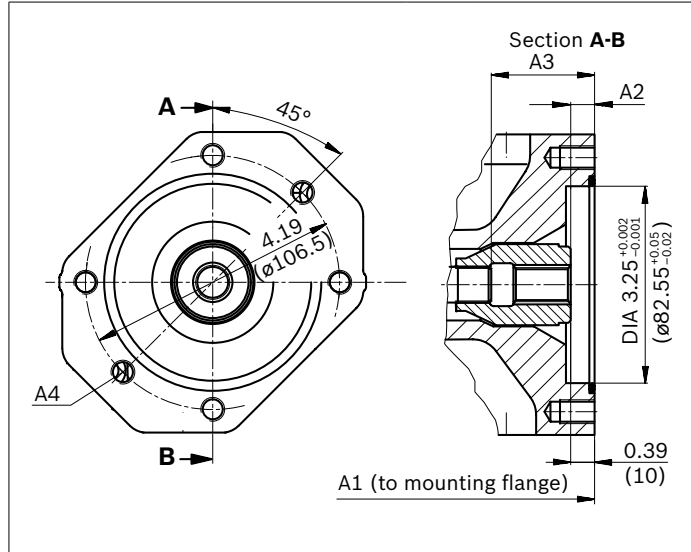

▼ 82-2

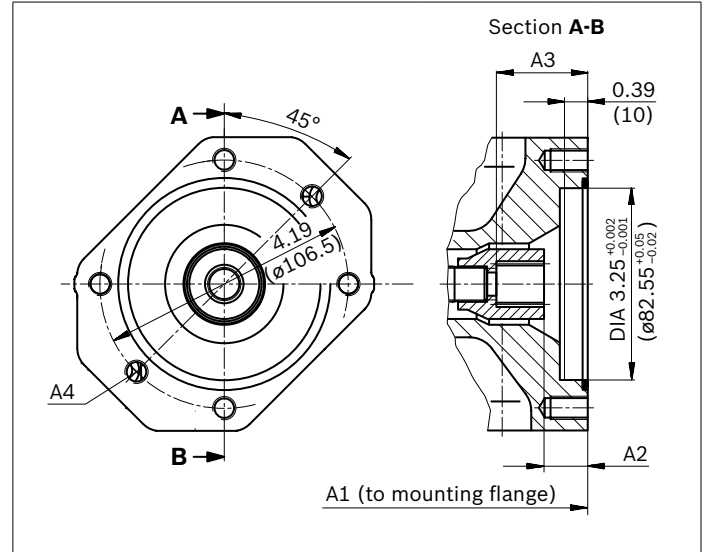

K01	NG	A1	A2	A3	A4 ²⁾
(SAE J744 16-4 (A))					
	18	7.17 (182)	0.39 (10)	1.70 (43.3)	M10; 0.57 (14.5) deep
	28	8.03 (204)	0.39 (10)	1.33 (33.7)	M10; 0.63 (16) deep
	45	9.02 (229)	0.42 (10.7)	2.10 (53.4)	M10; 0.63 (16) deep
	71	10.50 (267)	0.46 (11.8)	2.41 (61.3)	M10; 0.79 (20) deep
	88	10.50 (267)	0.46 (11.8)	2.41 (61.3)	M10; 0.79 (20) deep
	100	13.30 (338)	0.41 (10.5)	2.56 (65)	M10; 0.63 (16) deep
	140	13.80 (350)	0.43 (10.8)	3.04 (77.3)	M10; 0.63 (16) deep

K52	NG	A1	A2	A3	A4 ²⁾
(SAE J744 19-4 (A-B))					
	18	7.17 (182)	0.74 (18.8)	1.52 (38.7)	M10; 0.57 (14.5) deep
	28	8.03 (204)	0.74 (18.8)	1.52 (38.7)	M10; 0.63 (16) deep
	45	9.02 (229)	0.74 (18.9)	1.52 (38.7)	M10; 0.63 (16) deep
	71	10.50 (267)	0.84 (21.3)	1.63 (41.4)	M10; 0.79 (20) deep
	88	10.50 (267)	0.84 (21.3)	1.63 (41.4)	M10; 0.79 (20) deep
	100	13.30 (338)	0.75 (19)	1.53 (38.9)	M10; 0.63 (16) deep
	140	13.80 (350)	0.74 (18.9)	1.52 (38.6)	M10; 0.63 (16) deep


1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Thread according to DIN 13, see instruction manual for maximum tightening torques.

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability over sizes							Code
Diameter	Symbol	Diameter		18	28	45	71	88	100	140	
101-2 (A)	⌀, ⌀ ^o , ∞	7/8 in	13T 16/32DP	—	•	•	•	•	•	•	K68
		1 in	15T 16/32DP	—	—	•	•	•	•	•	K04


• = Available — = Not available

▼ 101-2

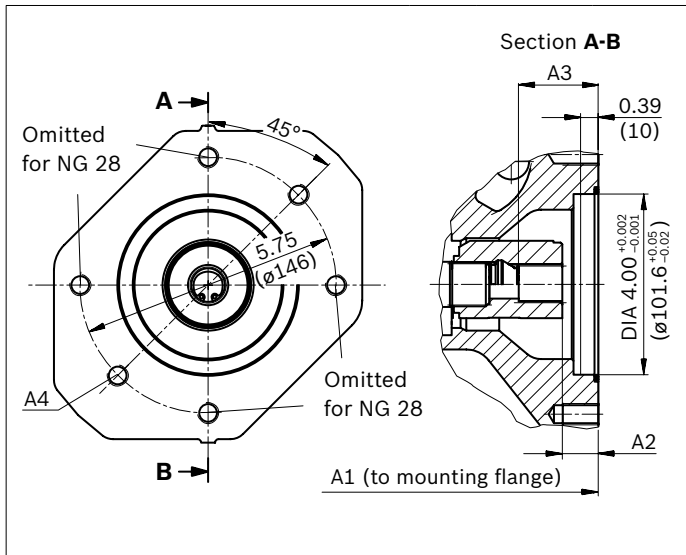

K68	NG	A1	A2	A3	A4 ²⁾
(SAE J744 22-4 (B))					
	28	8.03 (204)	0.70 (17.8)	1.64 (41.7)	M12; ³⁾
	45	9.02 (229)	0.70 (17.9)	1.64 (41.7)	M12; 0.71 (18) deep
	71	10.50 (267)	0.80 (20.3)	1.76 (44.7)	M12; 0.79 (20) deep
	88	10.50 (267)	0.80 (20.3)	1.76 (44.7)	M12; 0.79 (20) deep
	100	13.30 (338)	0.71 (18)	1.65 (41.9)	M12; 0.79 (20) deep
	140	13.80 (350)	0.70 (17.8)	1.64 (41.6)	M12; 0.79 (20) deep

▼ 101-2

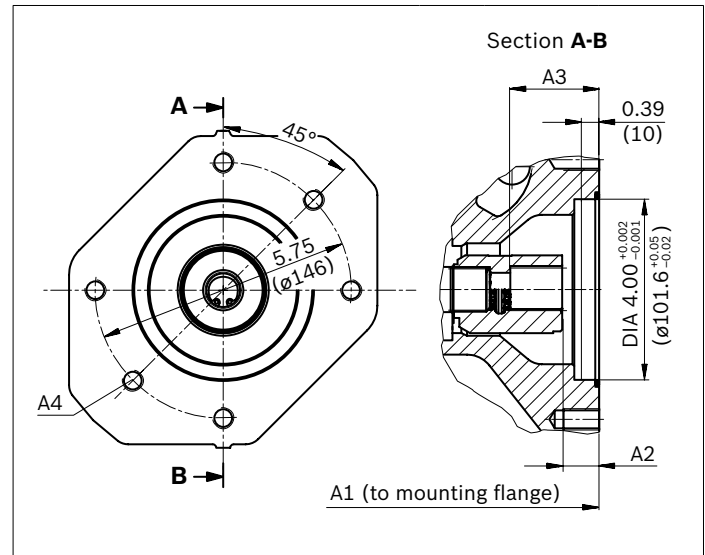


K04	NG	A1	A2	A3	A4 ²⁾
(SAE J744 25-4 (B-B))					
	45	9.02 (229)	0.72 (18.4)	1.84 (46.7)	M12; 0.71 (18) deep
	71	10.50 (267)	0.82 (20.8)	1.93 (49.1)	M12; 0.79 (20) deep
	88	10.50 (267)	0.82 (20.8)	1.93 (49.1)	M12; 0.79 (20) deep
	100	13.30 (338)	0.72 (18.2)	1.83 (46.6)	M12; 0.79 (20) deep
	140	13.80 (350)	0.72 (18.3)	1.81 (45.9)	M12; 0.79 (20) deep

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Thread according to DIN 13, see instruction manual for maximum tightening torques.
3) Continuous

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability over sizes							Code
Diameter	Symbol	Diameter		18	28	45	71	88	100	140	
127-2 (C)	ø ^p , ∞	1 1/4 in	14T 12/24DP	-	-	-	•	•	•	•	K07
		1 1/2 in	17T 12/24DP	-	-	-	-	-	•	•	K24


• = Available - = Not available

▼ 127-2

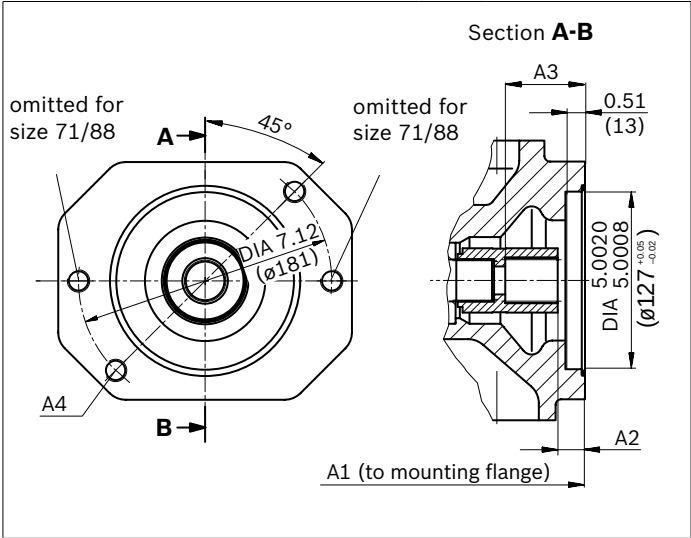

K07	NG	A1	A2	A3	A4 ²⁾
(SAE J744 32-4 (C))					
71	10.50 (267)	0.89 (21.8)	2.31 (58.6)	M16; ³⁾	
88	10.50 (267)	0.89 (21.8)	2.31 (58.6)	M16; ³⁾	
100	13.30 (338)	0.77 (19.5)	2.22 (56.4)	M16; ³⁾	
140	13.80 (350)	0.76 (19.3)	2.21 (56.1)	M16; 0.94 (24) deep	

▼ 127-2

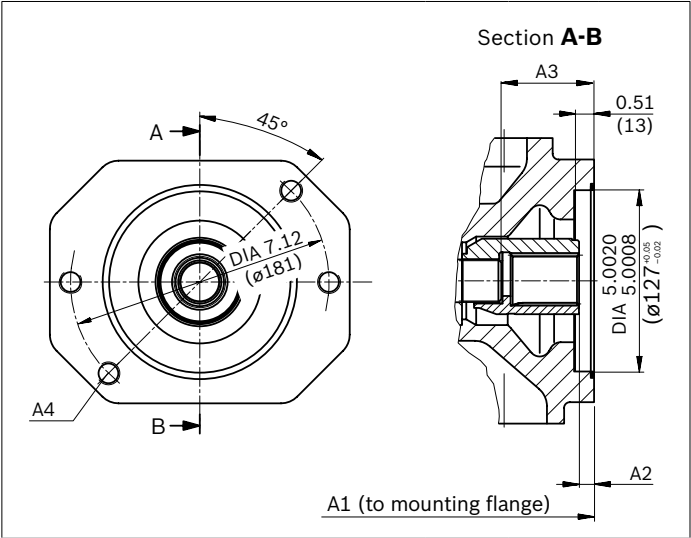

K24	NG	A1	A2	A3	A4 ²⁾
(SAE J744 38-4 (C-C))					
100	13.30 (338)	0.41 (10.5)	2.56 (65)	M16; ³⁾	
140	13.80 (350)	0.31 (7.9)	2.88 (73.3)	M16; 1.26 (32) deep	


1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
2) Thread according to DIN 13, see instruction manual for maximum tightening torques.

3) Continuous

Flange ISO 3019-1 (SAE)		Hub for splined shaft ¹⁾		Availability over sizes							Code
Diameter	Symbol	Diameter		18	28	45	71	88	100	140	
152-4 (A)	88	1 3/4 in	13T 8/16DP	-	-	-	-	-	-	●	K17

● = Available - = Not available

▼ 152-4

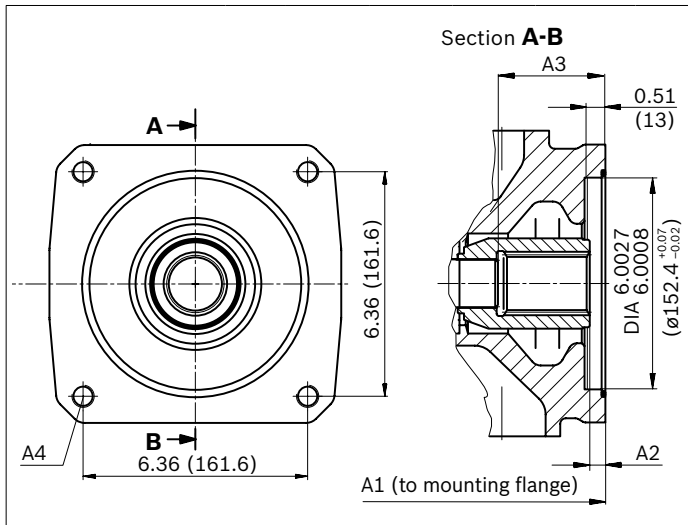

K17	NG	A1	A2	A3	A4 ²⁾
(SAE J744 44-4 (D))					
	140	13.78	0.43	3.04	M16×2; ³⁾
	(350)	(11)	(77.3)		

1) According to ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
 2) Thread according to DIN 13, see instruction manual for maximum tightening torques.

3) Continuous

Overview of mounting options

SAE – mounting flange

Through drive		Mounting options – 2nd pump				
Flange ISO 3019-1	Hub for splined shaft	Code	(A)A10VSO/31 NG (shaft)	A10V(S)O/5x NG (shaft)	Gear pump Design (NG)	Through drive available for size
82-2 (A)	5/8 in	K01	18 (U)	10 (U) 18 (U)	AZPF	18 to 140
	3/4 in	K52	18 (S, R)	10 (S) 18 (S, R)	–	18 to 140
101-2 (B)	7/8 in	K68	28 (S, R) 45 (U, W) ¹⁾	28 (S, R) 45 (U, W) ¹⁾	AZPN/G	28 to 140
	1 in	K04	45 (S, R) –	45 (S, R) 60, 63, 72 (U, W) ²⁾	PGH4	45 to 140
127-2 (C)	1 1/4 in	K07	71 (S, R) 88 (S, R) 100 (U, W) ³⁾	85 (U, W) ³⁾ 100 (U, W)	–	71 to 140
	1 1/2 in	K24	100 (S)	85 (S) 100 (S)	PGH5	100 to 140
152-4 (4-hole D)	1 3/4 in	K17	140 (S)	–	–	140

¹⁾ Not for main pump NG28 with K68

²⁾ Not for main pump NG45 with K04

³⁾ Not for main pump NG71 and NG88 with K07

Combination pumps (A)A10VSO + (A)A10VSO

By using combination pumps, it is possible to have independent circuits without the need for splitter gearboxes. When ordering combination pumps, the type designations of the 1st and 2nd pumps must be linked by a “+”.

Order example:

AA10VSO100DFR1/31R-VSC62K04+


AA10VSO45DFR/31R-VSC62N00

If no further pumps are to be mounted at the factory, the simple type designation is sufficient.

It is permissible to use a combination of two single pumps of the same nominal size (tandem pump) considering a dynamic mass acceleration of maximum 10 g (= 98.1 m/s²) without additional support brackets.

Each through drive is plugged with a **non-pressure-resistant** cover. Before commissioning the units, they must therefore be equipped with a pressure-resistant cover. Through drives can also be ordered with pressure-resistant covers. Please specify in plain text.

For combination pumps consisting of more than two pumps, the mounting flange must be rated for the permissible mass torque (please contact us).

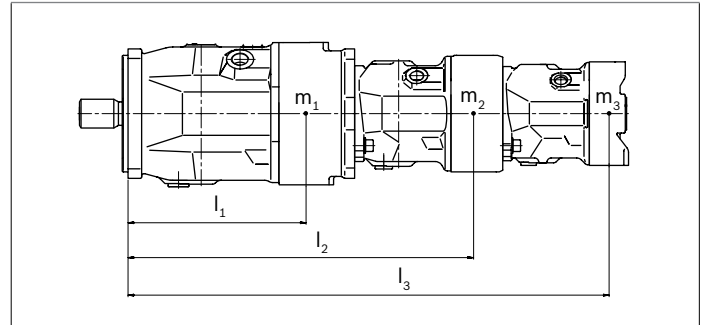

m_1, m_2, m_3	Weight of pump	[lbs (kg)]
l_1, l_2, l_3	Distance from center of gravity	[in (mm)]
$T_m = (m_1 \times l_1 + m_2 \times l_2 + m_3 \times l_3) \times \frac{1}{12 (102)}$		[lb-ft (Nm)]

Permissible mass moment of inertia

Size			18	28	45	71	88	100	140	
static	T_m	lb-ft	369	649	1010	1593	1593	2213	3319 ¹⁾	2213 ²⁾
		(Nm)	(500)	(880)	(1370)	(2160)	(2160)	(3000)	(4500) ¹⁾	(3000) ²⁾
dynamic at 10 g (98.1 m/s ²)	T_m	lb-ft	37	65	101	159	159	221	332 ¹⁾	221 ²⁾
		(Nm)	(50)	(88)	(137)	(216)	(216)	(300)	(450) ¹⁾	(300) ²⁾
Weight without through drive and (N00)	m	lbs	28	40	52	78	78	109	144	
		(kg)	(12.9)	(18)	(23.5)	(35.2)	(35.2)	(49.5)	(65.4)	
Weight with through drive and (K..)	m	lbs	30	43	55	84	84	122	164	
		(kg)	(13.8)	(19.3)	(25.1)	(38)	(38)	(55.4)	(74.4)	
Distance, center of gravity without through drive (N00)	l_l	in	3.62	3.94	4.45	5.00	5.00	6.34	6.26	
		(mm)	(92)	(100)	(113)	(127)	(127)	(161)	(159)	
Distance, center of gravity with through drive (K..)	l_l	in	3.86	4.21	4.72	5.39	5.39	7.01	7.09	
		(mm)	(98)	(107)	(120)	(137)	(137)	(178)	(180)	

¹⁾ 4-hole flange (D)

²⁾ 2-hole flange (C)


Connector for solenoids

HIRSCHMANN DIN EN 175 301-803-A /ISO 4400

without bidirectional suppressor diode **H**

There is the following type of protection with the installed mating connector:

- IP65 (DIN/EN 60529)

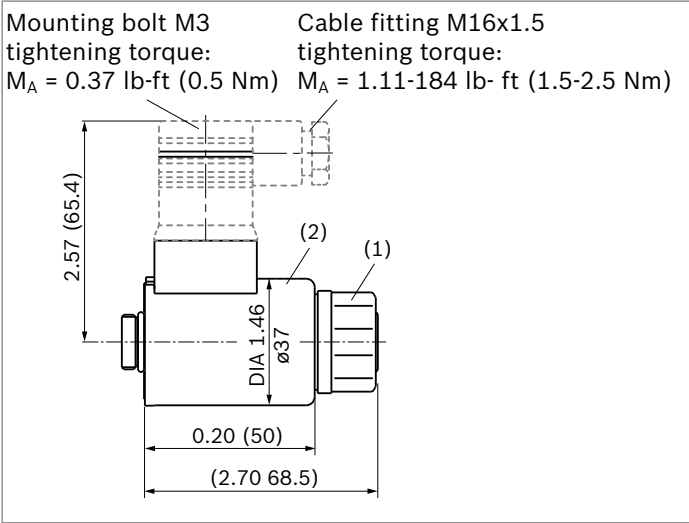


The seal ring in the cable fitting is suitable for lines of diameter 0.18 in to 0.39 in (4.5 mm to 10 mm).
The mating connector is not included in the scope of delivery.
This can be supplied by Bosch Rexroth on request.

Electronic controls

Control	Electronics	Further information	
Electric amplifier	VT 2000 ¹⁾	analog	29904
Electrical amplifier modules	VT 11029 VT 11030 ¹⁾	analog	29741
Valve amplifiers for proportional pressure valves	VT-VSPA1-1 ¹⁾ VT-VSPA1K-1 ¹⁾	analog	30111

Bosch Rexroth material number: R902602623

Device plug on the solenoid according to DIN 43650

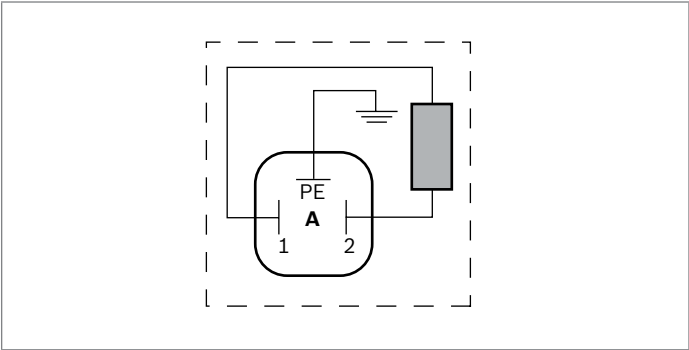

Notice

- If necessary, you can change the position of the connector by turning the solenoid.
- The procedure is defined in the instruction manual.

1) Only 24 V nominal voltage

Installation instructions

General

The axial piston unit must be filled with hydraulic fluid and air bled during commissioning and operation. This must also be observed following a longer standstill as the axial piston unit may empty via the hydraulic lines.

Particularly with the “drive shaft up/down” installation position, filling and air bleeding must be carried out completely as there is, for example, a danger of dry running. The leakage in the housing area must be discharged to the reservoir via the highest available tank port (**L**, **L₁**).

For combination pumps, the leakage must be drained off at each pump.

If a shared drain line is used for several units, make sure that the respective case pressure is not exceeded. The shared drain line must be dimensioned to ensure that the maximum permissible case pressure of all connected units is not exceeded in any operational conditions, particularly at cold start. If this is not possible, separate drain lines must be installed if necessary.

To achieve favorable noise values, decouple all connecting lines using elastic elements and avoid above-reservoir installation.

In all operating conditions, the suction lines and the drain lines must flow into the reservoir below the minimum fluid level. The permissible suction height h_s results from the total pressure loss. However, it must not be higher than $h_{s \max} = 31.5 \text{ in (800 mm)}$. The minimum suction pressure at port **S** must also not fall below 12 psi (0.8 bar) absolute during operation and during cold start.

When designing the reservoir, ensure adequate distance between the suction line and the drain line. This prevents the heated, return flow from being drawn directly back into the suction line.

Key, see page 47.

Installation position





See the following examples **1** to **12**.

Further installation positions are available upon request.

Recommended installation position: **1** and **3**

Below-reservoir installation (standard)

Below-reservoir installation means that the axial piston unit is installed outside of the reservoir and below the minimum fluid level of the reservoir.

Installation position	Air bleed	Filling
1	L	L₁
		
2¹⁾	L₁	L
		
3	L₁	L
		
4¹⁾	L	L₁
		

¹⁾ Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

Above-reservoir installation

Above-reservoir installation means that the axial piston unit is installed above the minimum fluid level of the reservoir. To prevent the axial piston unit from draining in position **6**, the height difference $h_{ES\ min}$ must be at least 0.98 in (25 mm). Observe the maximum permissible suction height $h_{S\ max} = 31.5$ in (800 mm). A check valve in the drain line is only permissible in individual cases. Consult us for approval..

Installation position	Air bleed	Filling
5	L	L
6¹⁾	L₁	L₁
7	L₁	L₁
8¹⁾	L	L

Key, see page 47.

Inside-reservoir installation

Inside-reservoir installation is when the axial piston unit is installed in the reservoir below the minimum fluid level. The axial piston unit is completely below the hydraulic fluid. If the minimum fluid level is equal to or below the upper edge of the pump, see chapter “Above-reservoir installation”. Axial piston units with electrical components (e.g., electric control, sensors) may not be installed in a reservoir below the fluid level.

Installation position	Air bleed	Filling
9	Via the highest available port L	Automatically via the open port L or L₁ due to the position under the hydraulic fluid level
10¹⁾	Via the highest available port L₁	Automatically via the open port L , L₁ due to the position under the hydraulic fluid level
11	Via the highest available port L₁	Automatically via the open port L or L₁ due to the position under the hydraulic fluid level
12¹⁾	Via the highest available port L	Automatically via the open port L or L₁ due to the position under the hydraulic fluid level

1) Because complete air bleeding and filling are not possible in this position, the pump should be air bled and filled in a horizontal position before installation.

Key	
F	Filling / air bleeding
S	Suction port
L; L₁	Drain port
SB	Baffle (baffle plate)
$h_{t \min}$	Minimum required immersion depth (7.87 in (200 mm))
$h_{\min}$	Minimum required distance to the reservoir bottom (3.94 in (100 mm))
$h_{ES \min}$	Minimum necessary height required to protect the axial piston unit from draining (0.98 in (25 mm))
$h_{S \max}$	Maximum permissible suction height (31.5 in (800 mm))

Notice

Port **F** is part of the external piping and must be provided on the customer side to make filling and air bleeding easier.

Project planning notes

- ▶ The (A)A10VSO axial piston variable pump is designed to be used in open circuit.
- ▶ The project planning, installation and commissioning of the axial piston unit requires the involvement of qualified skilled personnel.
- ▶ Before using the axial piston unit, please read the corresponding instruction manual completely and thoroughly. If necessary, this can be requested from Bosch Rexroth.
- ▶ Before finalizing your design, please request a binding installation drawing.
- ▶ The specified data and notes contained herein must be observed.
- ▶ Depending on the operating conditions of the axial piston unit (working pressure, fluid temperature), the characteristic curve may shift.
- ▶ Preservation: Our axial piston units are supplied as standard with preservative protection for a maximum of 12 months. If longer preservative protection is required (maximum 24 months), please specify this in plain text when placing your order. The preservation periods apply under optimal storage conditions, details of which can be found in the data sheet 90312 or in the instruction manual.
- ▶ Not all versions of the product are approved for use in a safety function according to ISO 13849. Please consult the responsible contact person at Bosch Rexroth if you require reliability parameters (e.g. MTTF_d) for functional safety.
- ▶ Depending on the type of control used, electromagnetic effects can be produced when using solenoids. When a direct current is applied, solenoids do not cause electromagnetic interference nor is their operation impaired by electromagnetic interference. Other behavior can result when a modulated direct current (e.g. PWM signal) is applied. Potential electromagnetic interference for persons (e.g. persons with a pacemaker) and other components must be tested by the machine manufacturer.

- ▶ Pressure controllers are not protection against overpressure. A pressure relief valve is to be provided for the hydraulic system.
- ▶ Working ports:
 - The ports and fastening threads are designed for the specified maximum pressure. The machine or system manufacturer must ensure that the connecting elements and lines correspond to the specified application conditions (pressure, flow, hydraulic fluid, temperature) with the necessary safety factors.
 - The working ports and function ports are only intended to accommodate hydraulic lines.

Safety instructions

- ▶ During and shortly after operation, there is a risk of getting burnt on the axial piston unit and especially on the solenoids. Take the appropriate safety measures (e.g. by wearing protective clothing).
- ▶ Moving parts in control equipment (e.g. valve spools) can, under certain circumstances, get stuck in position as a result of contamination (e.g. impure hydraulic fluid, abrasion, or residual dirt from components). As a result, the hydraulic fluid flow and the build-up of torque in the axial piston unit can no longer respond correctly to the operator's specifications. Even the use of various filter elements (external or internal flow filtration) will not rule out a fault but merely reduce the risk. The machine/system manufacturer must test whether remedial measures are needed on the machine for the application concerned in order to bring the driven consumer into a safe position (e.g. safe stop) and ensure any measures are properly implemented.